



RoHS
Compliant
2002/95/EC

MODEL CODE

SS-22H07-GEE

Knob Type





GEE

VAC



L(mm)

~

DIMENSIONS

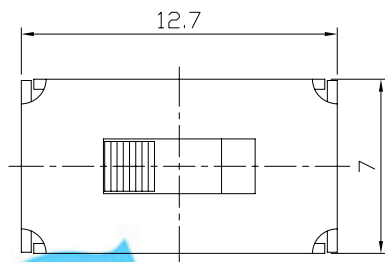

CIRCUIT DIAGRAM

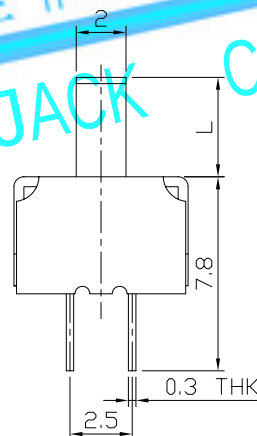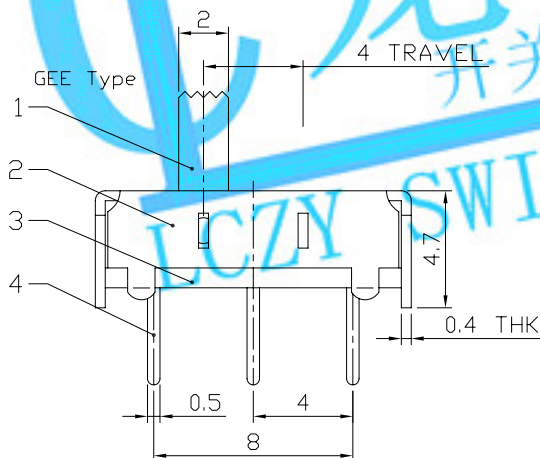

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	4mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7					OVER 1.5mm: ±0.2mm	MAT'L				
6	SPRING PLATED	PBS STRIP	1	NATURAL		SEE NOTE	TITLE: SLIDE SWITCH / VERTICAL		PART NO.: SS-22H07	
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED			DR: Ricky 2015/05/28		DWG NO.: ADL-22H07	
4	TERMINAL	BRASS STRIP	6	Ag PLATED			CHKD: Ricky 2015/05/28			
3	BASE	PHENOLIC RESIN	1	NATURAL		FINISH	APPD:			
2	FRAME	STEEL STRIP	1	Ni PLATED		SEE NOTE				
1	KNOB	POM	1	BLACK		Q'TY				
NO.	PARTS	MATERIAL	Q'TY	FINISHING						

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

