


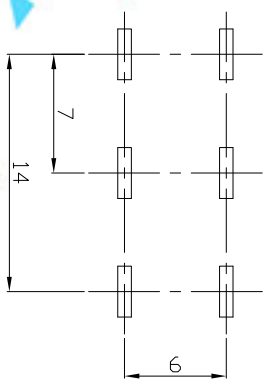
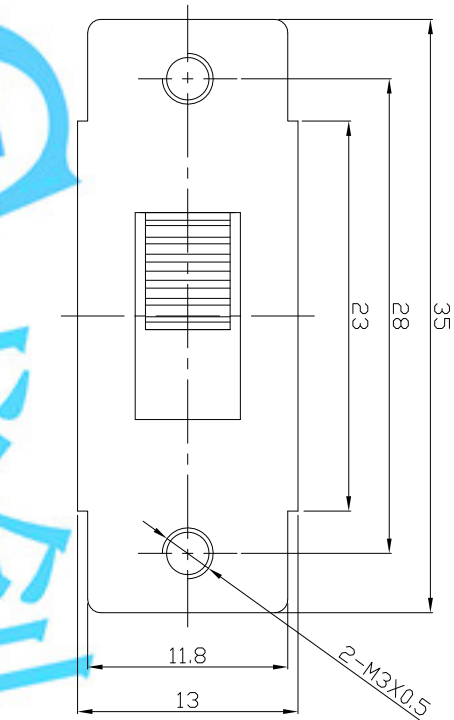



MODEL CODE

SS-22K29-GHA

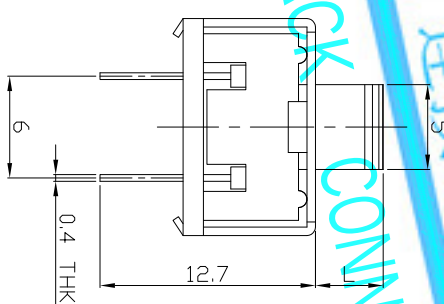

P.C.B LAYOUT
BOTTOM VIEW
ELECTRO-MECHANICAL CHARACTERISTICS
Refer to additional specifications

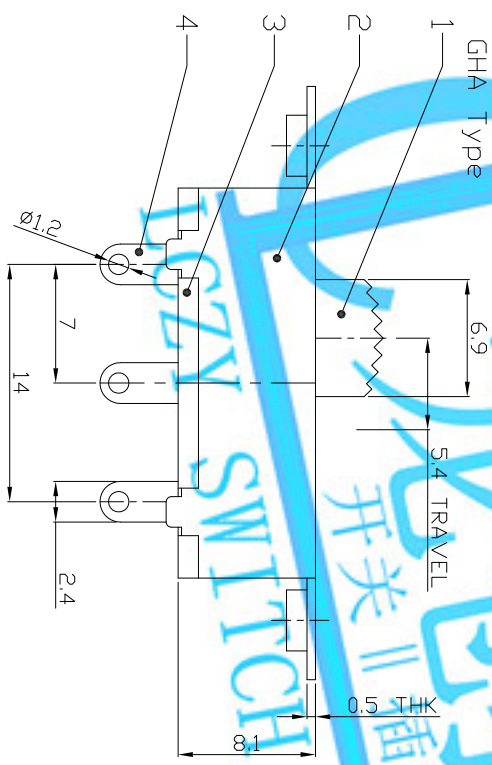

RATING	0.3A 50V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	5.4mm
OPERATING FORCE	300±100gf
OPERATING LIFE(cycles)	10,000

DIMENSIONS		UNITS		LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
8				WITHIN 1.5mm: ±0.1mm	MAT'L	TITLE:	
7				OVER 1.5mm: ±0.2mm	SEE NOTE	PART NO.:	
6	CONTACT CLIP	BRASS STRIP	2	Ag PLATED		SLIDE SWITCH / VERTICAL	
5	SPRING	STEEL WIRE	2	NATURAL		SS-22K29	
4	TERMINAL	BRASS STRIP	6	Ag PLATED	FINISH	DWG NO.:	
3	BASE	PHENOLIC RESIN	1	NATURAL	SEE NOTE	ADL-22K29	
2	FRAME	STEEL STRIP	1	NI PLATED	DR: <i>Rocky</i> 2015/09/04	SCALE	
1	KNDB	POM	1	BLACK	CHKD: <i>Rocky</i> 2015/09/04	SHEET	
NO.	PARTS	MATERIAL	Q'TY	FINISHING	APPD:	REV.	
						A	
						CUSTOMER DRAWING	