

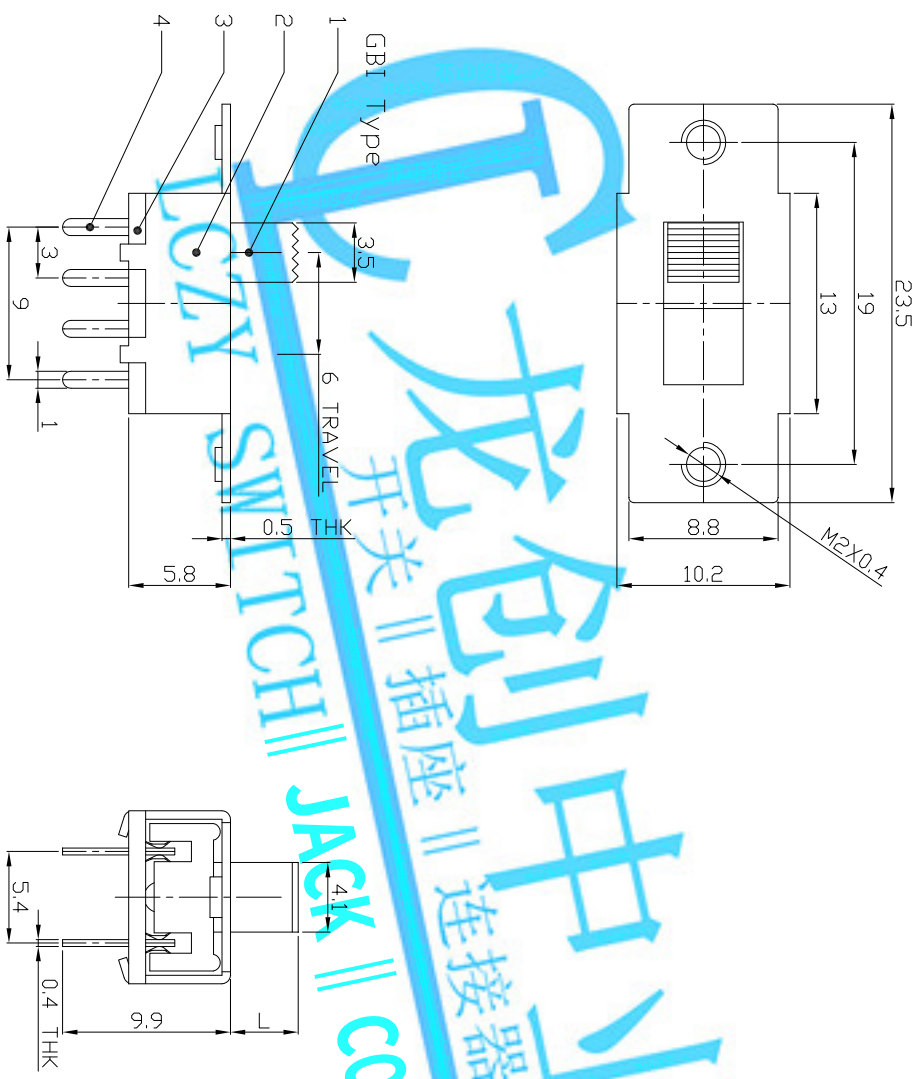



DIMENSIONS



MODEL CODE

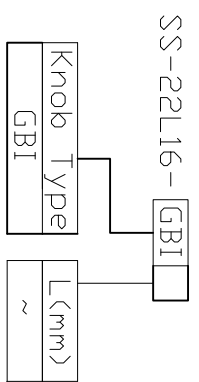

P.C.B. LAYOUT
BOTTOM VIEW
ELECTRO-MECHANICAL CHARACTERISTICS
Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	6mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8	STEEL BALL	STEEL	1	NATURAL	WITHIN 1.5mm: ±0.1mm OVER 1.5mm: ±0.2mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7	SPRING	STEEL WIRE	1	NATURAL		MAT'L	TITLE:			
6	CONTACT CLIP	PBS STRIP	2	AG PLATED		SEE NOTE	SLIDE SWITCH / VERTICAL			
5	CONTACT CLIP	PBS STRIP	2	AG PLATED		FINISH	PART NO.:			
4	TERMINAL	BRASS STRIP	8	AG PLATED		SEE NOTE	SS-22L16			
3	BASE	PHENOLIC RESIN	1	NATURAL		DR:	2015/09/04	DWG NO.:	ADL-22L16	
2	FRAME	STEEL STRIP	1	NI PLATED		CHKD:	2015/09/04	SCALE	SHEET	REV.
1	KNDB	POM	1	BLACK		Q'TY		3/1	1/1	A
ND.	PARTS	MATERIAL	Q'TY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.		APPD:			CUSTOMER DRAWING