

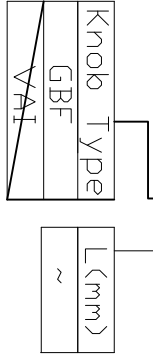




MODEL CODE

SS-23103-GBF

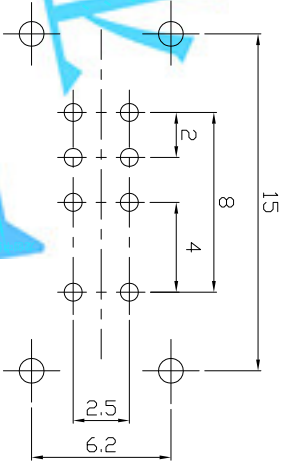



CIRCUIT DIAGRAM

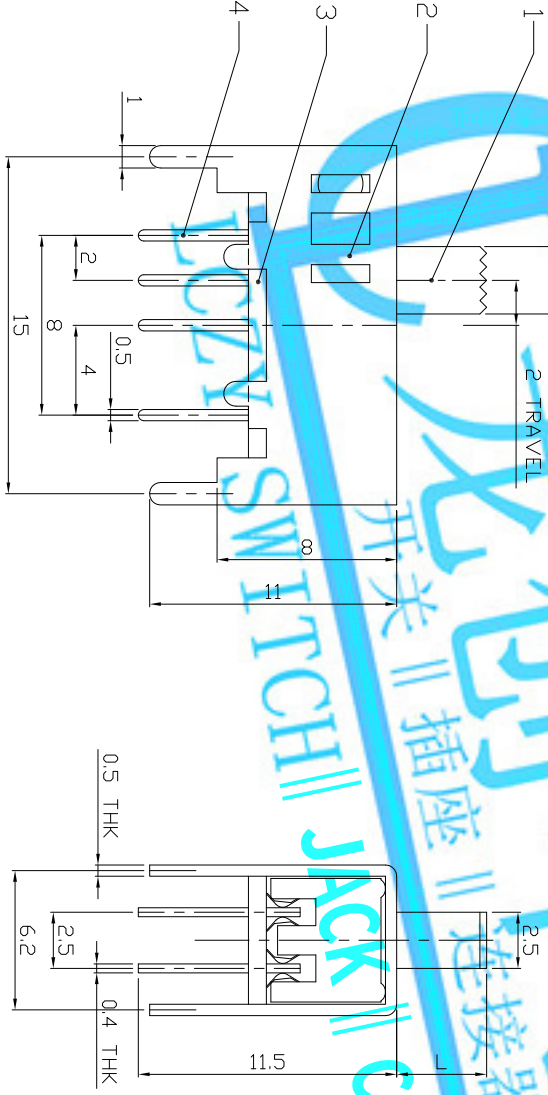

BOTTOM VIEW
ELECTRO-MECHANICAL CHARACTERISTICS
Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P3T
CONTACT RESISTANCE	100m Ω MAX.
TIMING	SHORTING
TRAVEL	2mm
OPERATING FORCE	250 $\pm$ 100gf
OPERATING LIFE(cycles)	10,000

LONGCHUANG ZHONGYE (HK)CO.,LIMITED									
TITLE:		PART NO:		SS-23D03					
SLIDE SWITCH / VERTICAL		DWG NO:							
		ADL-23D03							
DR: <i>Ricky</i> 2015/09/09				CUSTMER DRAWING					
CHKD: <i>Ricky</i> 2015/09/09									
APPD:									
SCALE		SHEET		REV.					
3:1		1/1		A					
UNITS mm									
WITHIN 1.5mm: ±0.1mm		MAT'L		SEE NOTE					
OVER 1.5mm: ±0.2mm									
FINISH		SEE NOTE		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH, INC. AND SHALL NOT BE REPRODUCED, COPIED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH, INC.					
Q'TY		Q'TY							
ND.		PARTS		MATERIAL					
1		KNDB							
2		FRAME							
3		BASE		PHENDLIC RESIN					
5		CONTACT CLIP		PBS STRIP					
4		TERMINAL		BRASS STRIP					
7		STEEL BALL		STEEL WIRE					
8				STEEL					