





RoHS
Compliant
2002/95/EC

MODEL CODE



SS-23D04-GBF

REV.	ECN.	NO.	APPD.

DIMENSIONS

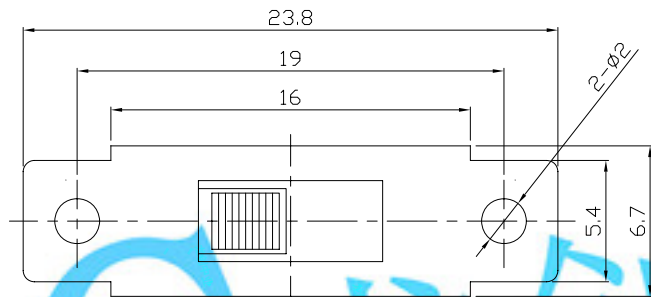

Knob Type	L(mm)
GBF	~
VAI	~

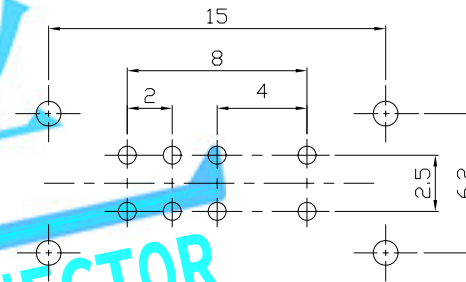

PCB LAYOUT
BOTTOM VIEW



CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

GBF Type

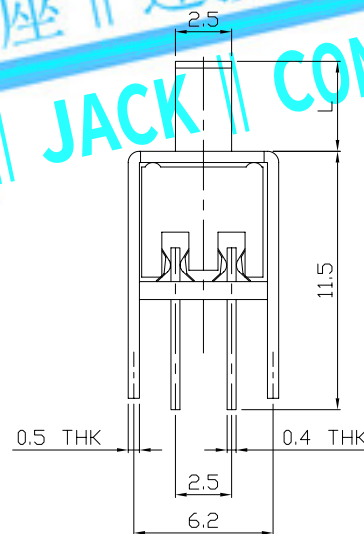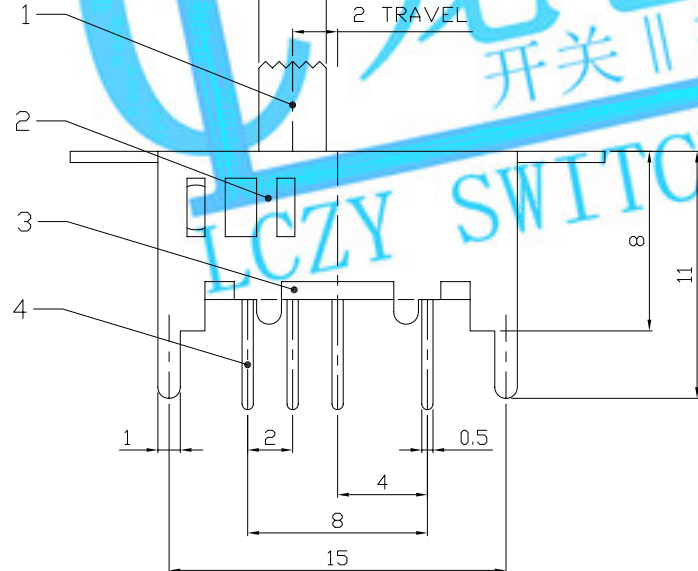

NO.	PARTS	MATERIAL	Q'TY	FINISHING	WITHIN 1.5mm: ±0.1mm	OVER 1.5mm: ±0.2mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
8	STEEL BALL	STEEL	2	NATURAL	WITHIN 1.5mm: ±0.1mm	OVER 1.5mm: ±0.2mm	MAT'L	TITLE: SLIDE SWITCH / VERTICAL PART NO.: SS-23D04			
7	SPRING	STEEL WIRE	1	NATURAL	WITHIN 1.5mm: ±0.1mm	OVER 1.5mm: ±0.2mm	SEE NOTE				
6	CONTACT CLIP	PBS STRIP	2	Ag PLATED	WITHIN 1.5mm: ±0.1mm	OVER 1.5mm: ±0.2mm	FINISH	DR: Ricky 2015/09/04 DWG NO.: ADL-23D04			
5	TERMINAL	BRASS STRIP	8	Ag PLATED	WITHIN 1.5mm: ±0.1mm	OVER 1.5mm: ±0.2mm	SEE NOTE				
4	BASE	PHENOLIC RESIN	1	NATURAL	WITHIN 1.5mm: ±0.1mm	OVER 1.5mm: ±0.2mm	Q'TY	CHKD: Ricky 2015/09/04 SCALE 3:1 SHEET 1/1 REV. A CUSTOMER DRAWING			
3	FRAME	STEEL STRIP	1	Ni PLATED	WITHIN 1.5mm: ±0.1mm	OVER 1.5mm: ±0.2mm					
2	KNOB	POM	1	BLACK	WITHIN 1.5mm: ±0.1mm	OVER 1.5mm: ±0.2mm		APPD:			
1	PARTS	MATERIAL	Q'TY	FINISHING	WITHIN 1.5mm: ±0.1mm	OVER 1.5mm: ±0.2mm					

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.