



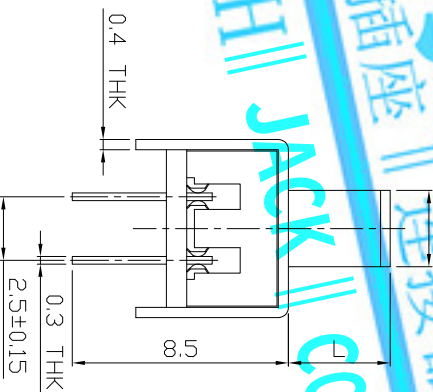


DIMENSIONS

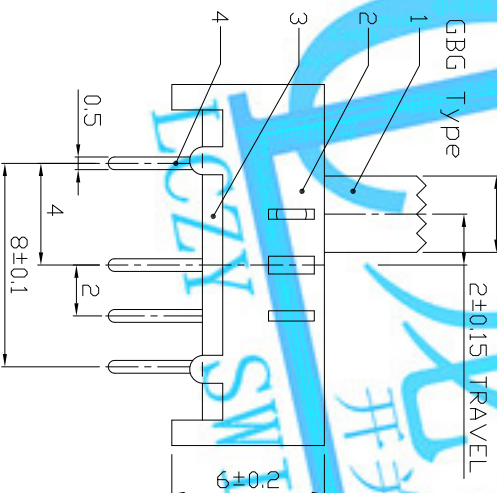

MODEL CODE

SS-23D05-GBG

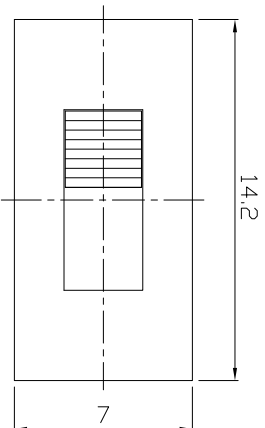

P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	2±0.15mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7					OVER 1.5mm: ±0.2mm					
6	SPRING WIRE	PBS STRIP	2	NATURAL		SEE NOTE	TITLE:	PART NO:		
5	CONTACT CLIP	PBS STRIP	2	AG PLATED			SLIDE SWITCH / VERTICAL		SS-23D05	
4	TERMINAL	BRASS STRIP	8	AG PLATED			DR:	2015/09/07		
3	BASE	PHENOLIC RESIN	1	NATURAL			2015/09/07		ADL-23D05	
2	FRAME	STEEL STRIP	1	NI PLATED			CHKD:	2015/09/07		
1	KNOB	POM	1	BLACK			APPD:	SCALE	SHEET	REV.
NO.	PARTS	MATERIAL	Q'TY	FINISHING				4:1	1/1	A
							CUSTOMER DRAWING			