
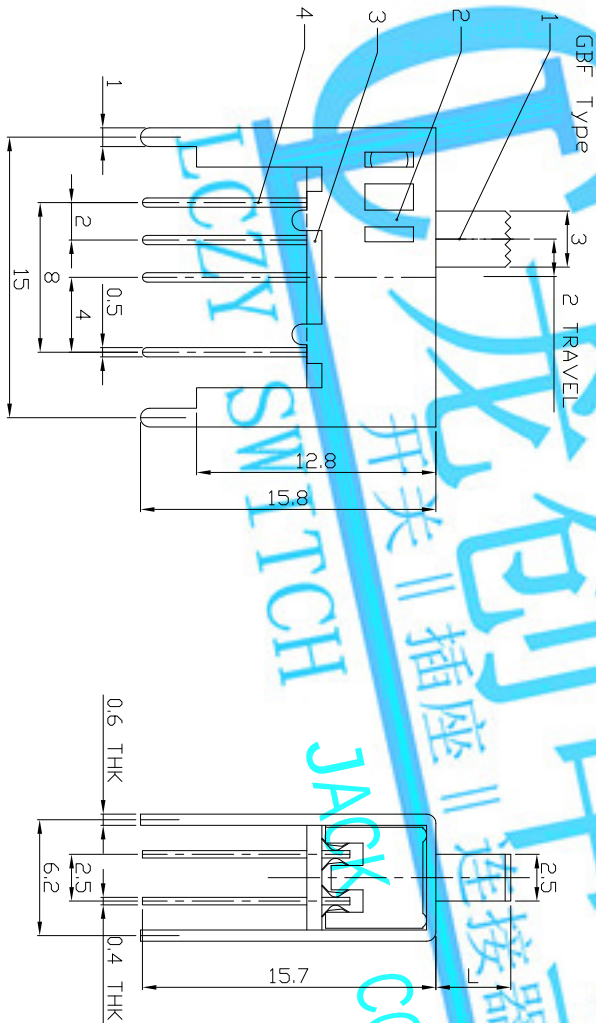

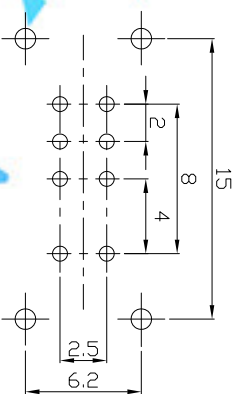
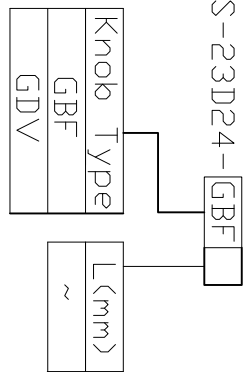



DIMENSIONS

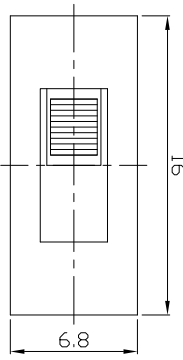

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

|                        |             |
|------------------------|-------------|
| RATING                 | 0.3A 50V DC |
| CIRCUIT                | 2P3T        |
| CONTACT RESISTANCE     | 100mΩ MAX.  |
| TIMING                 | SHORTING    |
| TRAVEL                 | 2mm         |
| OPERATING FORCE        | 300±100gf   |
| OPERATING LIFE(cycles) | 10,000      |

|   |              |                |      |           |                      |          |            |                                    |
|---|--------------|----------------|------|-----------|----------------------|----------|------------|------------------------------------|
| 8 | STEEL BALL   | STEEL          | 1    | NATURAL   | WITHIN 1.5mm: ±0.1mm | UNITS    | mm         | LONGCHUANG ZHONGYE (HK)CO.,LIMITED |
| 7 | SPRING       | STEEL WIRE     | 1    | NATURAL   | OVER 1.5mm: ±0.2mm   | MAT'L    | SEE NOTE   | TITLE:                             |
| 6 | CONTACT CLIP | PBS STRIP      | 2    | Ag PLATED |                      | FINISH   | SEE NOTE   | SLIDE SWITCH / VERTICAL            |
| 5 | TERMINAL     | BRASS STRIP    | 8    | Ag PLATED |                      | SEE NOTE | SEE NOTE   | DWG NO:                            |
| 4 | BASE         | PHENOLIC RESIN | 1    | NATURAL   |                      | CHKD:    | 2015/05/28 | ADL-23D24                          |
| 3 | FRAME        | STEEL STRIP    | 1    | NI PLATED |                      | APPD:    | 2015/05/28 | SCALE                              |
| 2 | KNDB         | PDM            | 1    | BLACK     |                      | 3:1      | 1/1        | A                                  |
| 1 | PARTS        | MATERIAL       | Q'TY | FINISHING |                      |          |            | CUSTOMER DRAWING                   |