


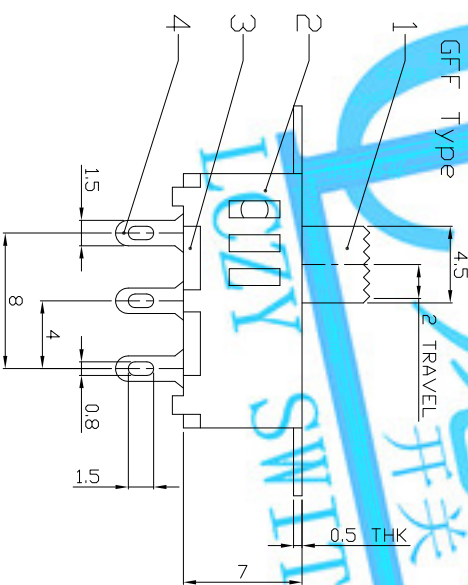
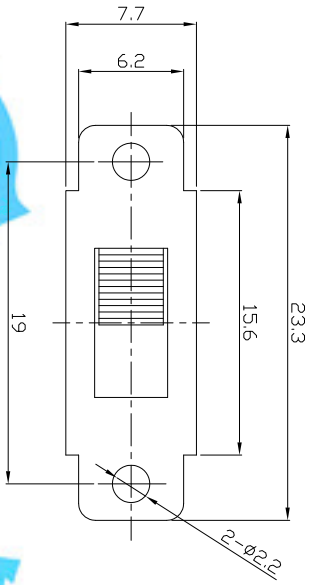



DIMENSIONS



MODEL CODE

SS-23D32-GFF



ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P3T
CONTACT RESISTANCE	30mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm OVER 1.5mm: ±0.2mm	UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED	TITLE: SLIDE SWITCH / VERTICAL PART NO: SS-23D32				
7	STEEL BALL	STEEL	1	NATURAL		mm						MAT'L
6	SPRING	STEEL WIRE	1	NATURAL	SEE NOTE	SEE NOTE						
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED								
4	TERMINAL	BRASS STRIP	6	Ag PLATED		FINISH		DR: Ricky 2015/09/07		DWG NO: ADL-23D32		
3	BASE	PHENOLIC RESIN	1	NATURAL		SEE NOTE		CHKD: Ricky 2015/09/07		SCALE SHEET	REV.	CUSTOMER DRAWING
2	FRAME	STEEL STRIP	1	BLACK	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.	Q'TY	APPRD:			2:1	1/1	A
1	KNDB	PDM	1	BLACK								
ND.	PARTS	MATERIAL	Q'TY	FINISHING								