



MODEL CODE

Knob Type	L (mm)
GDB	~

MODEL CODE

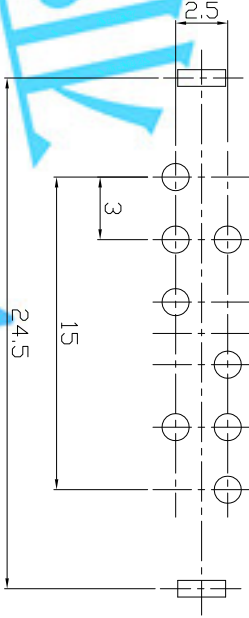

P.C.B LAYOUT


CIRCUIT DIAGRAM

BOTTOM VIEW

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	1.5A 250V AC
CIRCUIT	2P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	3mm
OPERATING FORCE	450±150gf
OPERATING LIFE(cycles)	10,000

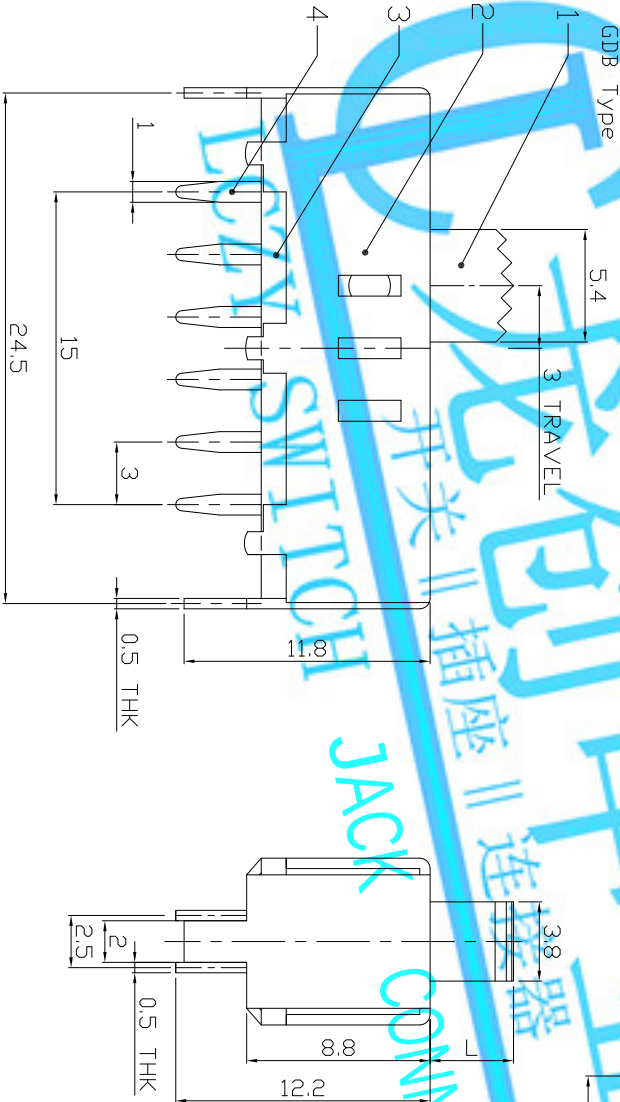

LONGCHUANG ZHONGYE (HK)CO.,LIMITED									
TITLE:			PART NO.:		SS-23F07				
SLIDE SWITCH / VERTICAL									
DR: Rocky 2015/10/07					DWG NO.:				
CHKD: Rocky 2015/10/07					ADL-23F07				
APPD:					SCALE		SHEET		REV.
					5/2		1/1		A
					CUSTOMER DRAWING				
UNITS mm									
WITHIN 1.5mm: ±0.1mm				OVER 1.5mm: ±0.2mm					
MATERIAL				SEE NOTE					
FINISH				FINISH					
SFE NOTE									
Q'TY									
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH, INC.									
Q'TY				FINISHING					
BLACK				NATURAL					
1				1					
POM				STEEL STRIP					
KNOB				FRAME					
PARTS				BASE					
				TERMINAL					
				CONTACT					
				SPRING					
				STEEL BALL					
				STEEL					
				8					