

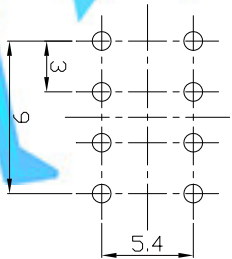
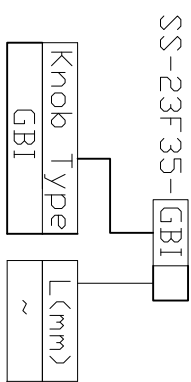
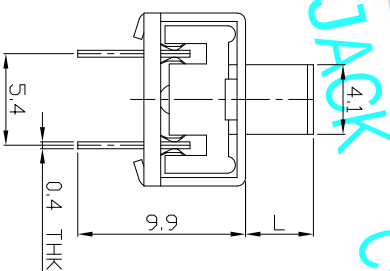


DIMENSIONS

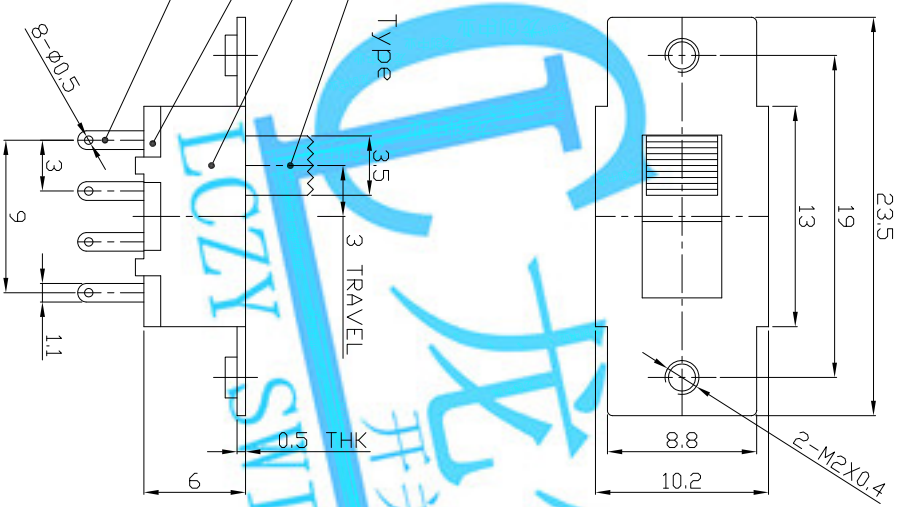

P.C.B. PAD OUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	3mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8	STEEL BALL	STEEL	1	NATURAL	WITHIN 1.5mm: ±0.1mm OVER 1.5mm: ±0.2mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7	SPRING	STEEL WIRE	1	NATURAL		MAT'L				
6	CONTACT CLIP	PBS STRIP	2	Ag PLATED		SEE NOTE				
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED		FINISH				
4	TERMINAL	BRASS STRIP	8	Ag PLATED		SEE NOTE				
3	BASE	PHENOLIC RESIN	1	NATURAL		DR: <i>Rocky</i> 2015/10/08	TITLE: SLIDE SWITCH / VERTICAL		PART NO.:	SS-23F35
2	FRAME	STEEL STRIP	1	NI PLATED		CHKD: <i>Rocky</i> 2015/10/08	DWG NO.:		ADL-23F35	
1	KNDB	PDM	1	BLACK		Q'TY	SCALE		SHEET	REV.
ND.	PARTS	MATERIAL	Q'TY	FINISHING		APPD:	3/1	1/1	A	CUSTOMER DRAWING