


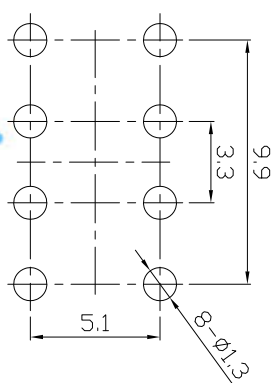
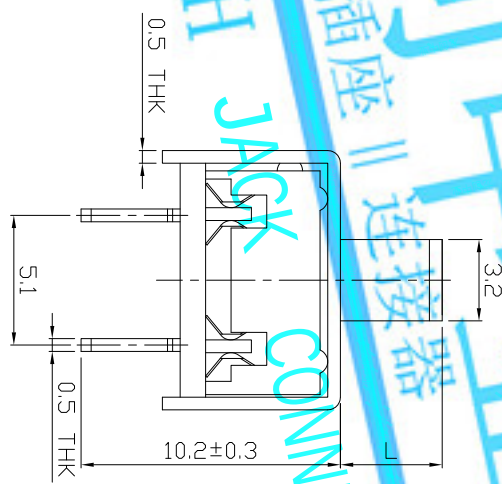
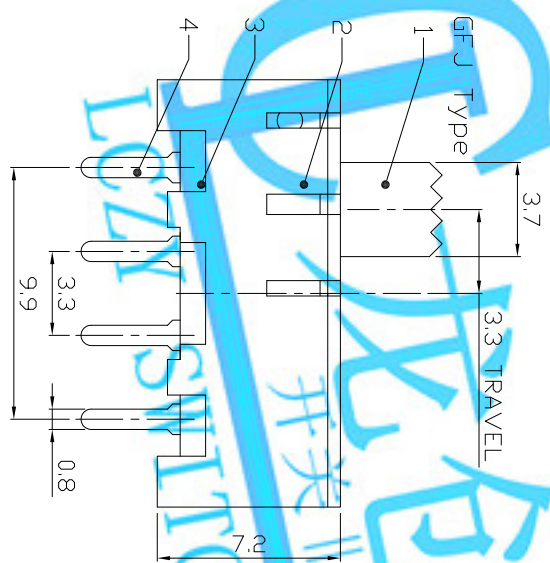


DIMENSIONS

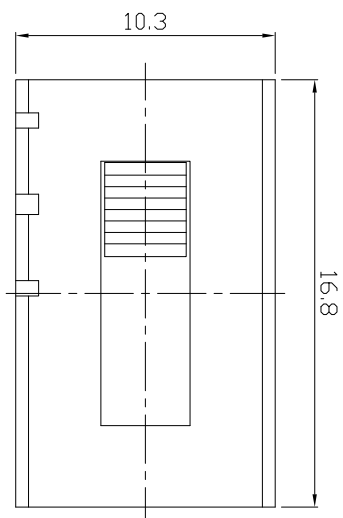

MODEL CODE

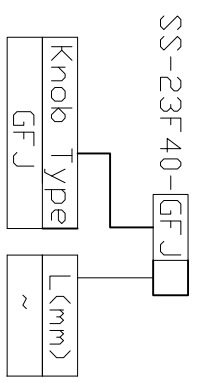

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	2P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	3.3mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED					
7	STEEL BALL	SUS	1	NATURAL			MAT'L	TITLE: SLIDE SWITCH / VERTICAL	PART NO.: SS-23F 40		DWG NO.: ADL-23F 40	
6	SPRING	SUS	1	NATURAL		SEE NOTE						
5	CONTACT CLIP	PBS	2	Ag CLAD								
4	TERMINAL	BRASS	2	Ag PLATED		FINISH						
3	BASE	PHENOLIC RESIN	1	NATURAL		SEE NOTE	DR: Ricky 2016/02/17					
2	FRAME	STEEL SHEET	1	NI PLATED		Q'TY	CHKD: Ricky 2016/02/17		SCALE SHEET REV.			
1	KNDB	PAG6	1	BLACK			APPD:		3/1	1/1	A	CUSTOMER DRAWING
ND.	PARTS	MATERIAL	Q'TY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR OTHERWISE USED WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.							
												
												