

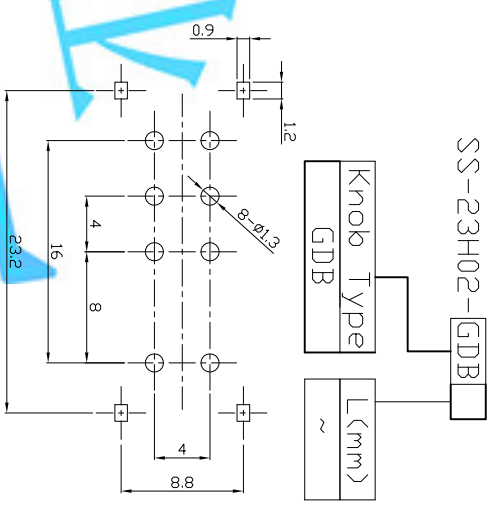
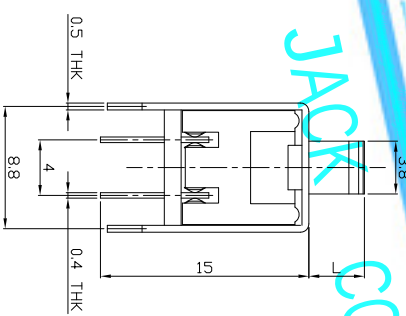
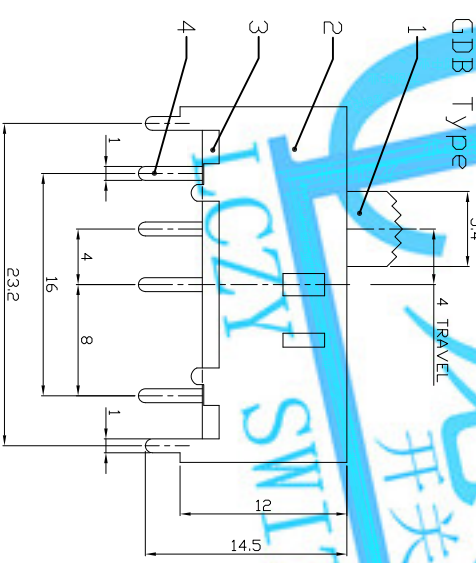


DIMENSIONS

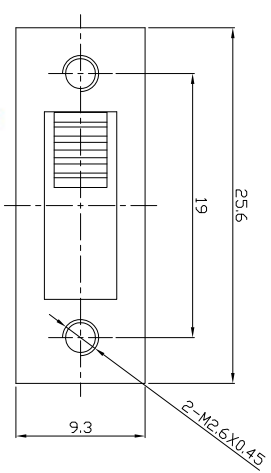

MODEL CODE

SS-23H02-GDB

Knob Type
GDB
L(mm)
~

P.C.B. LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	4mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8	STEEL BALL	STEEL	2	NATURAL	WITHIN 1.5mm: ±0.1mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED
7	SPRING	STEEL WIRE	1	NATURAL	OVER 1.5mm: ±0.2mm	MAT'L	SEE NOTE	TITLE: SLIDE SWITCH / VERTICAL
6	CONTACT CLIP	PBS STRIP	2	AG PLATED		FINISH	SEE NOTE	DR: 2015/10/08
5	TERMINAL	BRASS STRIP	8	AG PLATED		SEE NOTE	CHKD: 2015/10/08	DWG NO: ADL-23H02
4	BASE	PHENOLIC RESIN	1	NATURAL		Q'TY	1	SCALE: 1/1
3	FRAME	STEEL STRIP	1	NI PLATED		APPLD:	1	REV. A
2	KNDB	PDM	1	BLACK				CUSTOMER DRAWING
1	PARTS	MATERIAL	Q'TY	FINISHING				