

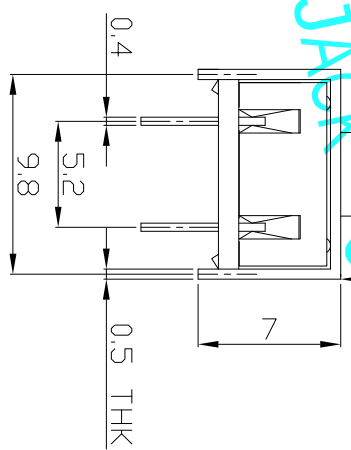
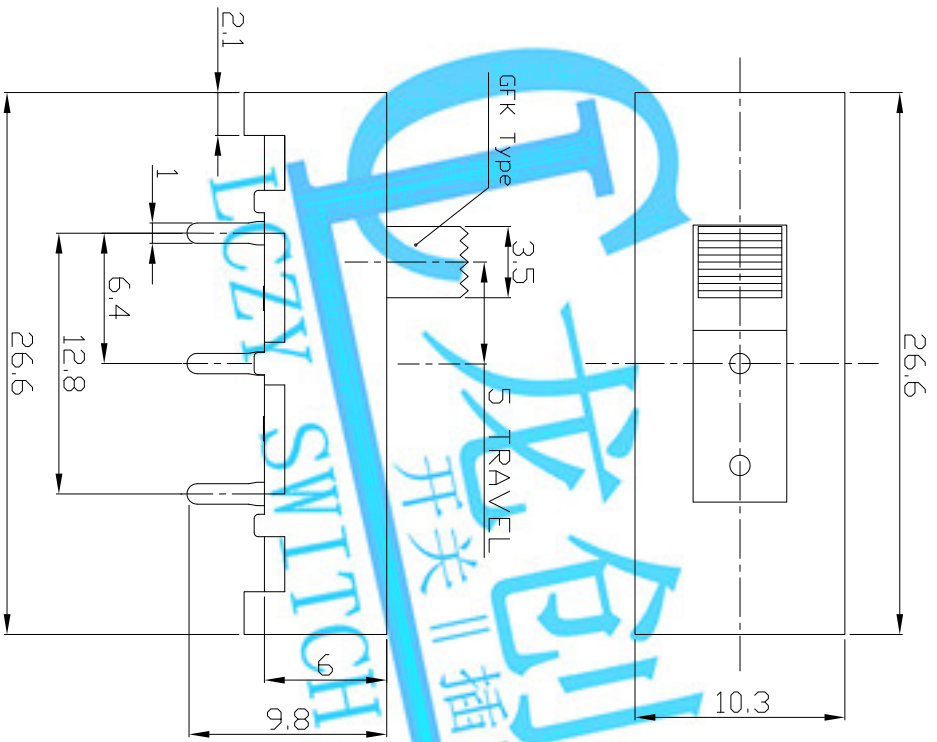


DIMENSIONS



P.C.B LAYOUT
BOTTOM VIEW



MODEL CODE

SS-23J02-GFK

Knob Type
GFK

L(mm)
~

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	5mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8	STEEL BALL	STEEL	1	NATURAL	WITHIN 1.5mm: ±0.1mm OVER 1.5mm: ±0.2mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7	SPRING	STEEL WIRE	1	NATURAL	SEE NOTE	MAT'L	TITLE: SLIDE SWITCH / VERTICAL PART NO.: SS-23J02			
6	CONTACT CLIP	PBS STRIP	2	Ag PLATED		FINISH				
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED	SEE NOTE	Q'TY	DR: Jieky 2016/02/18	DWG NO.:	ADL-23J02	SCALE SHEET 1/1
4	TERMINAL	BRASS STRIP	6	Ag PLATED		Q'TY	CHKD: Jieky 2016/02/18	REV.	A	
3	BASE	PHENOLIC RESIN	1	NATURAL	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR OTHERWISE USED WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.	Q'TY	APPD:	11	1/1	CUSTOMER DRAWING
2	FRAME	STEEL STRIP	1	NI PLATED		Q'TY	APPD:	11	1/1	CUSTOMER DRAWING
1	KNDB	PDM	1	BLACK	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR OTHERWISE USED WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.	Q'TY	APPD:	11	1/1	CUSTOMER DRAWING
ND	PARTS	MATERIAL	Q'TY	FINISHING		Q'TY	APPD:	11	1/1	CUSTOMER DRAWING