





RoHS
Compliant
2002/95/EC

MODEL CODE

SS-24D02-GEE



REV.	ECN.	NO.	APPD.

DIMENSIONS

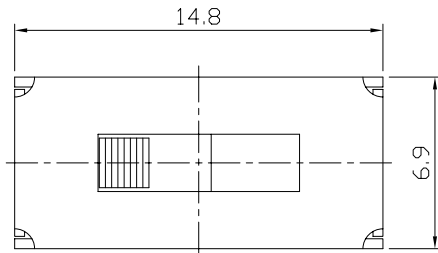



Knob Type
GEE
VAC

L(mm)
~

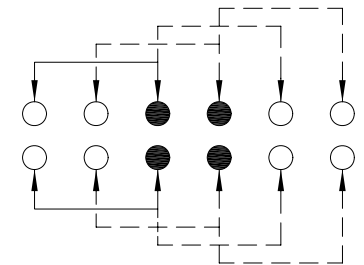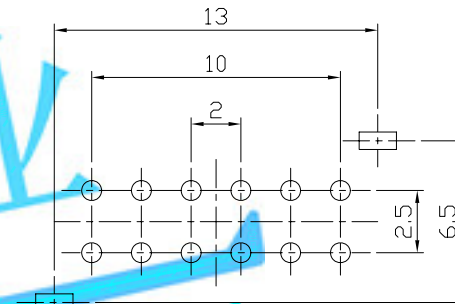

P.C.B. LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

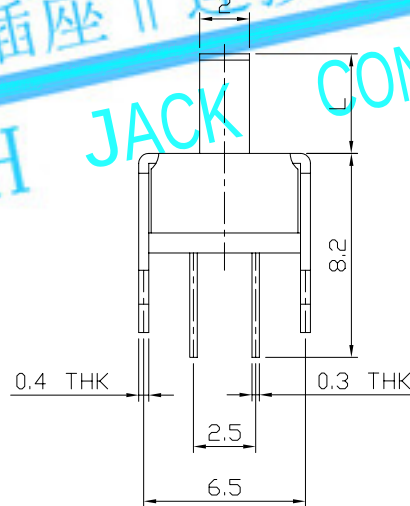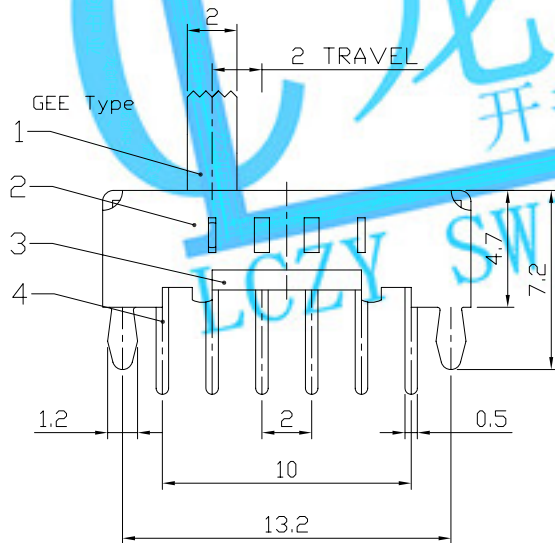

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P4T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7					OVER 1.5mm: ±0.2mm	MAT'L					
6	SPRING PLATED	SUS	1	NATURAL		SEE NOTE		TITLE:		PART NO.:	
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED				SLIDE SWITCH / VERTICAL		SS-24D02	
4	TERMINAL	BRASS STRIP	12	Ag PLATED				DR: Ricky 2015/05/29		DWG NO.:	
3	BASE	PHENOLIC RESIN	1	NATURAL				CHKD: Ricky 2015/05/29		ADL-24D02	
2	FRAME	STEEL STRIP	1	Ni PLATED				APPD:		SCALE	SHEET
1	KNOB	POM	1	BLACK						3:1	1/1
NO.	PARTS	MATERIAL	Q'TY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.					REV.	CUSTOMER
										A	DRAWING