
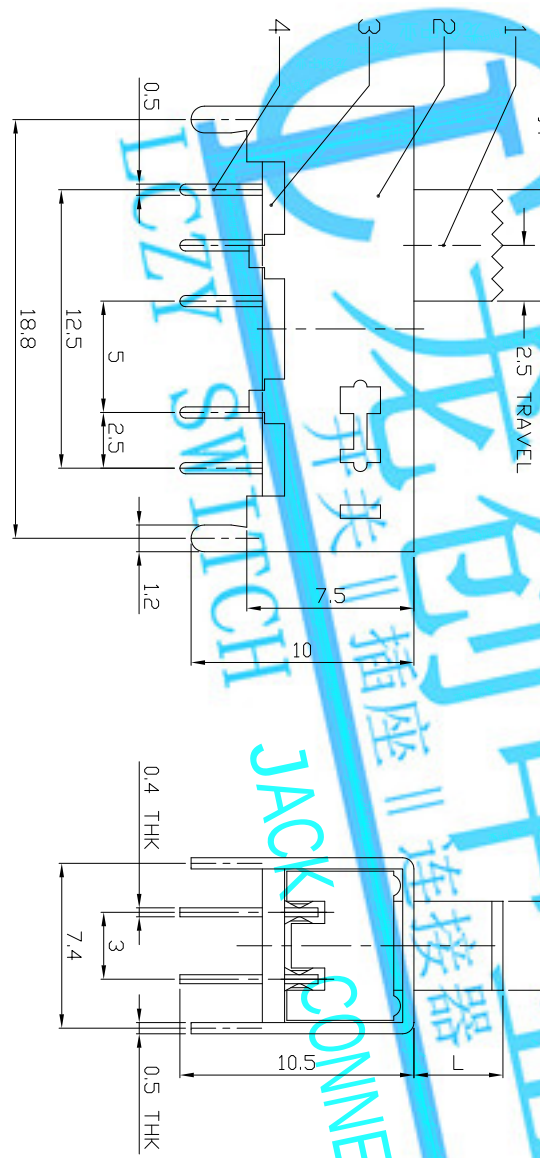

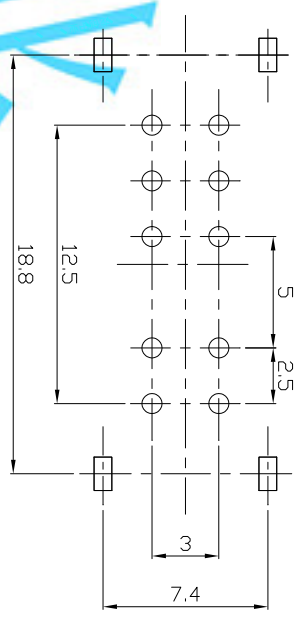


DIMENSIONS

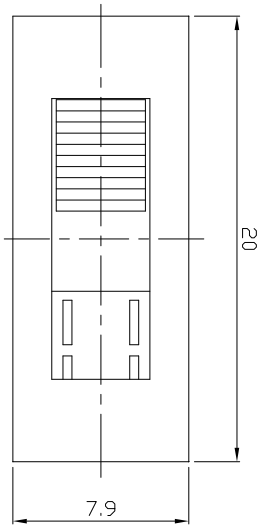

P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P4T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	2.5mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8	STEEL BALL	STEEL	2	NATURAL	WITHIN 1.5mm: ±0.1mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED
7	STEEL WIRE	STEEL	1	NATURAL	OVER 1.5mm: ±0.2mm	MAT'L	SEE NOTE	TITLE: SLIDE SWITCH / VERTICAL
6	CONTACT CLIP	PBS STRIP	2	Ag PLATED		FINISH	SEE NOTE	DR: 2015/05/29
5	TERMINAL	BRASS STRIP	10	Ag PLATED		SEE NOTE	CHKD: 2015/05/29	DWG NO: ADL-24E02
4	BASE	PHENOLIC RESIN	1	NATURAL		Q'TY	APPD: 2015/05/29	SCALE 3:1
3	FRAME	STEEL STRIP	1	NI PLATED		Q'TY	APPD: 2015/05/29	REV. 1/1
2	KNOB	POM	1	BLACK		Q'TY	APPD: 2015/05/29	CUSTOMER DRAWING
1	PARTS	MATERIAL	Q'TY	FINISHING		Q'TY	APPD: 2015/05/29	