

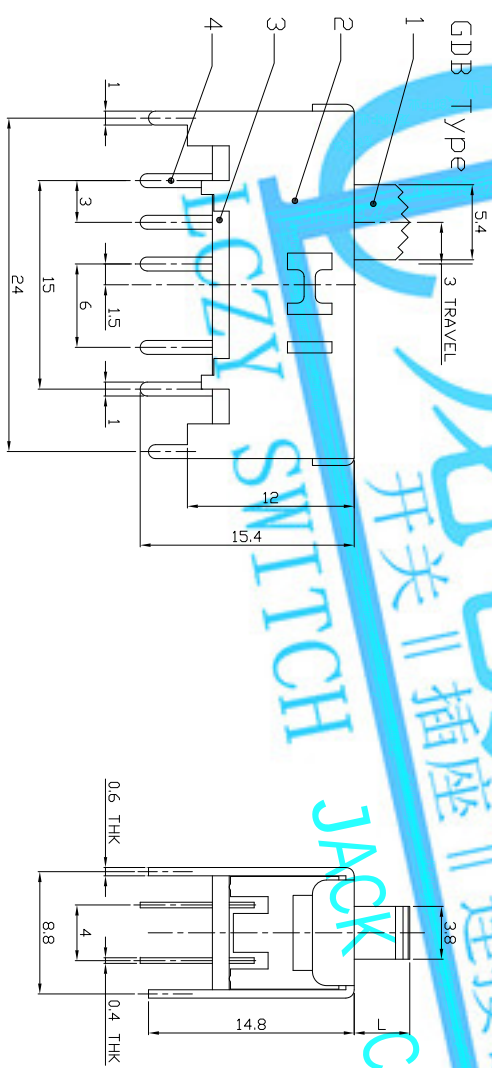
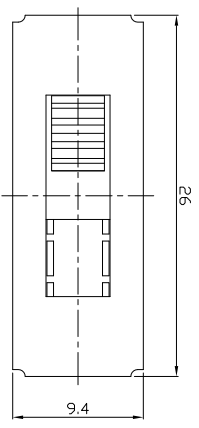


DIMENSIONS

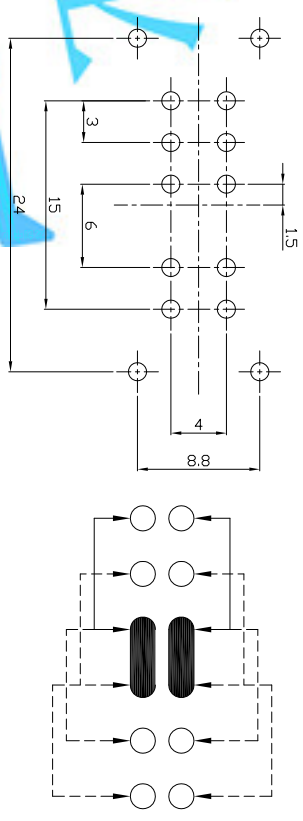

MODEL CODE

SS-24F01-GDB



P.C.B. LAYOUT
BOTTOM VIEW
ELECTRO-MECHANICAL CHARACTERISTICS
Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P4T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	3mm
OPERATING FORCE	300±80gf
OPERATING LIFE(cycles)	10,000

8							LONGCHUANG ZHONGYE (HK)CO.,LIMITED				
7	STEEL BALL	STEEL	2	NATURAL	WITHIN 1.5mm: ±0.1mm	UNITS	TITLE: SLIDE SWITCH / VERTICAL PART NO: SS-24F01				
6	SPRING	STEEL WIRE	1	NATURAL	OVER 1.5mm: ±0.2mm	mm					
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED		MAT'L					
4	TERMINAL	BRASS STRIP	10	Ag PLATED		SEE NOTE					
3	BASE	PHENOLIC RESIN	1	NATURAL		FINISH					
2	FRAME	STEEL STRIP	1	NI PLATED		SEE NOTE	DR: Ricky 2015/10/20	DWG NO:	ADL-24F01		
1	KNDB	PDM	1	BLACK		Q'TY	CHKD: Ricky 2015/10/20	SCALE SHEET REV. 1/1 A CUSTOMER DRAWING			
ND.	PARTS	MATERIAL	Q'TY	FINISHING			APPD:				
											