
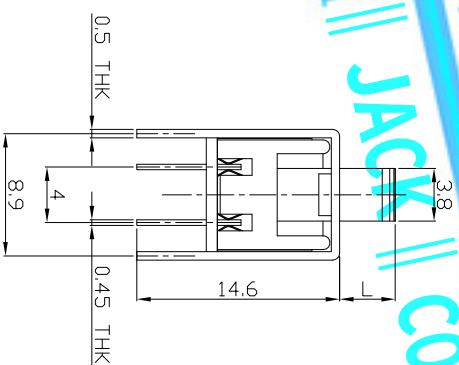
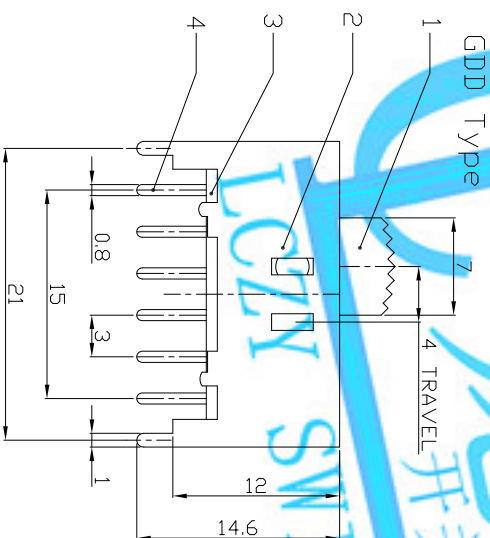
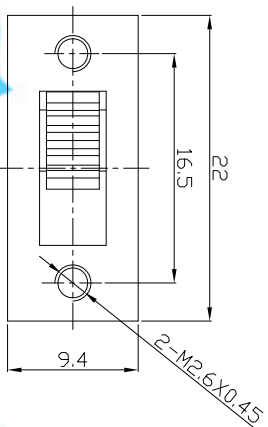


MODEL CODE

SS-42H11-GDD



ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	4P2T
CONTACT RESISTANCE	100m Ω MAX.
TIMING	SHORTING
TRAVEL	4mm
OPERATING FORCE	300 $\pm$ 80gf
OPERATING LIFE(cycles)	10,000

LONGCHUANG ZHONGYE (HK)CO.,LIMITED									
UNITS		mm		TITLE: SLIDE SWITCH / VERTICAL PART NO: SS-42H11					
MAT'L									
WITHIN 1.5mm: ±0.1mm OVER 1.5mm: ±0.2mm		SEE NOTE		Dwg NO: ADL-42H11					
		FINISH							
SEE NOTE		SEE NOTE		DR: Rocky 2015/10/21					
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LONGCHUANG ZHONGYE (HK)CO.,LIMITED AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INVENTECH INC.		Q'TY		CHKD: Rocky 2015/10/21					
APPRO: 				SCALE SHEET REV. 2:1 1/1 A					
CUST: 				CUSTOMER DRAWING					
NO.		PARTS		MATERIAL		Q'TY		FINISHING	
1		KNOB		POM		1		BLACK	
2		FRAME		STEEL STRIP		1		NI PLATED	
3		BASE		PHEENOLIC RESIN		1		NATURAL	
4		TERMINAL		BRASS STRIP		12		AG PLATED	
5		CONTACT CLIP		PBS STRIP		4		AG PLATED	
6		SPRING		STEEL WIRE		1		NATURAL	
7		STEEL BALL		STEEL		2		NATURAL	
8									