




RoHS
Compliant
2002/95/EC


REV.	ECN.	NO.	APPD.

DIMENSIONS

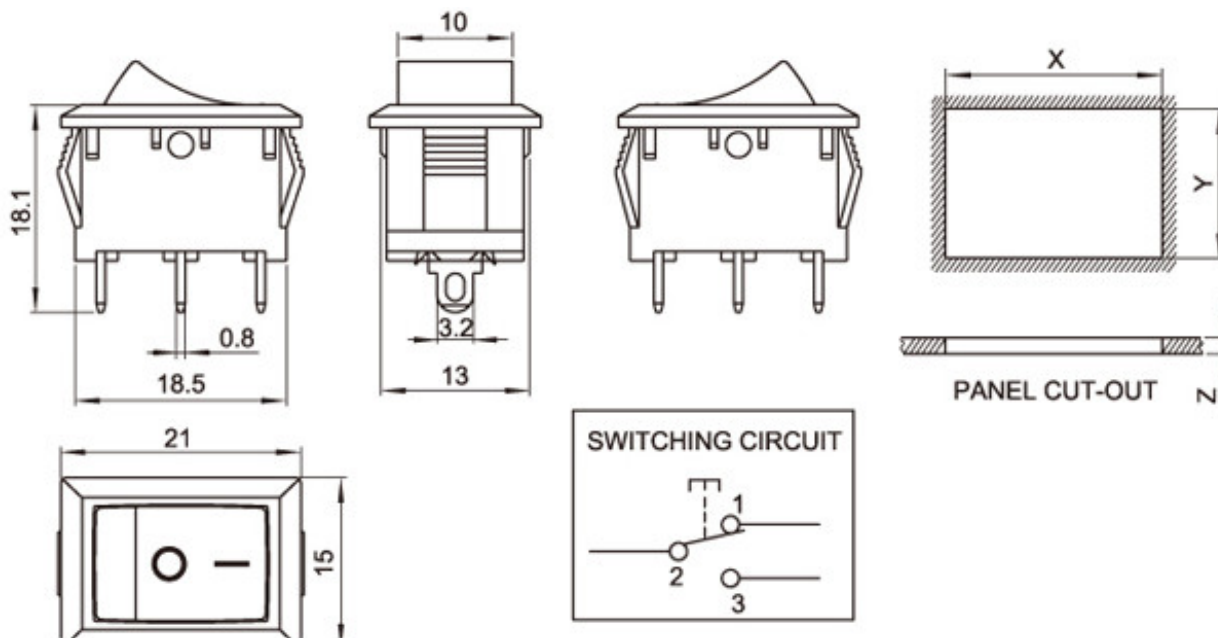

PANEL CUT-OUT		
Z	Y	X
0.70~1.25	12.9~13.1	18.9~19.1
1.25~2.00	12.9~13.1	19.1~19.2
2.00~3.00	12.9~13.1	19.3~19.4

SWITCHING CIRCUIT



技术要求

- 总装后表面光洁，无划伤、陷点，基座无裂痕；
- 按钮按动灵活、声音清脆，无卡滞、杂音等现象。

项 目	Item	参 数	Parameter
额定电流、电压 Rated voltage Rated current		10(6)A 250V	
绝缘电阻 Insulated resistance		≥100MΩ	
接触电阻 Contact resistance		≤50mΩ	
介电强度(极间) Dielectric strength		≥1500VAC/5S	
电器寿命 Endurance		≥10000 Cycles	
使用温度 Ambient temperature		T 85	

8						UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED				
7						mm					
6						MAT'L					
5						SEE NOTE		TITLE:	PART NO.:		
4								Rocker Switch			
3					FINISH	DR:	DWG NO.:				
2					SEE NOTE	CHKD:	RS601-1020012BB				
1					Q'TY	APPD:	SCALE	SHEET	REV.	CUSTOMER	
NO.	PARTS	MATERIAL	Q'TY	FINISHING		/	4:1	1/1	A	DRAWING	
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTE						