




RoHS
Compliant
2002/95/EC


REV.	ECN.	NO.	APPD.

DIMENSIONS

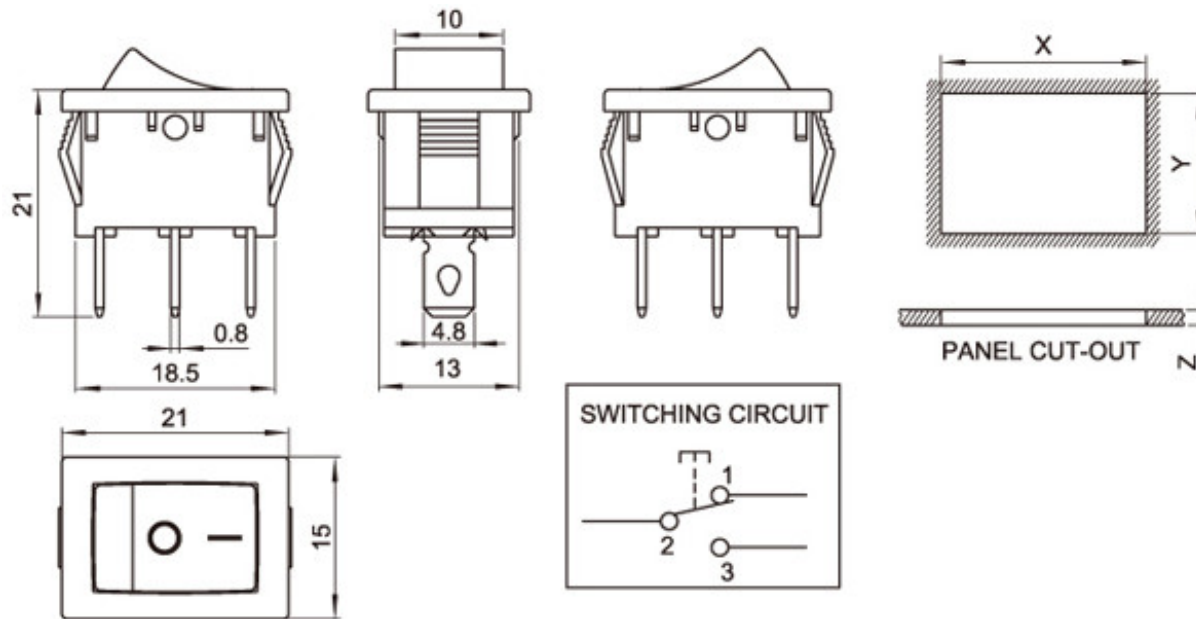

PANEL CUT-OUT		
Z	Y	X
0.70~1.25	12.9~13.1	18.9~19.1
1.25~2.00	12.9~13.1	19.1~19.2
2.00~3.00	12.9~13.1	19.3~19.4

SWITCHING CIRCUIT



技术要求

- 总装后表面光洁，无划伤、陷点，基座无裂痕；
- 按钮按动灵活、声音清脆，无卡滞、杂音等现象。

项 目	Item	参 数	Parameter
额定电流、电压 Rated voltage Rated current		10(6)A	250V
绝缘电阻 Insulated resistance		≥100MΩ	
接触电阻 Contact resistance		≤50mΩ	
介电强度(极间) Dielectric strength		≥1500VAC/5S	
电器寿命 Endurance		≥10000 Cycles	
使用温度 Ambient temperature		T 85	

8						UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7						MAT'L					
6						SEE NOTE		TITLE:	Rocker Switch		
5								PART NO.:			
4						FINISH		DR:			
3						SEE NOTE		DWG NO.:	RS601A-1020011BB		
2								CHKD:			
1								APPD:			
NO.	PARTS	MATERIAL	Q'TY	FINISHING		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTE		SCALE	SHEET	REV.	CUSTOMER DRAWING
								4:1	1/1	A	