





RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.

DIMENSIONS

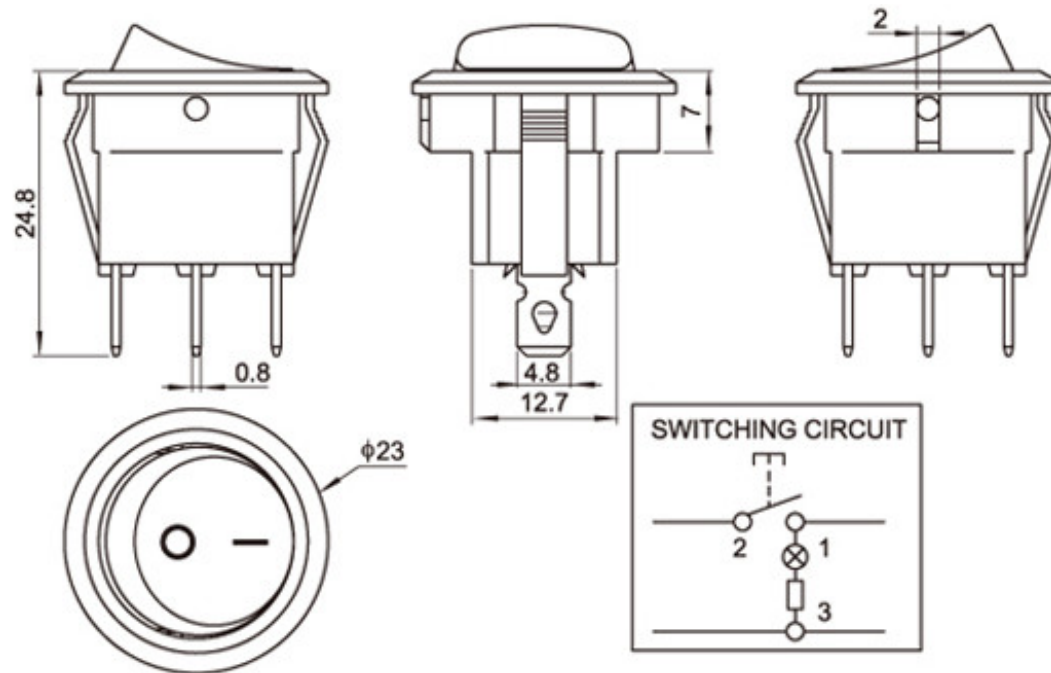

PANEL CUT-OUT		
Z	Y	X
0.70~1.25	20~20.1	2.1~2.2
1.25~2.00	20.1~20.2	2.1~2.2
2.00~3.00	20.2~20.3	2.1~2.2

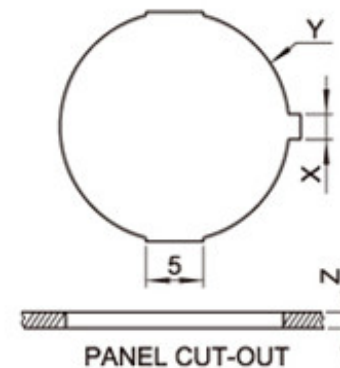

技术要求

- 总装后表面光洁，无划伤、陷点，基座无裂痕；
- 按钮按动灵活、声音清脆，无卡滞、杂音等现象。

项 目 Item	参 数 Parameter
额定电流、电压 Rated voltage Rated current	10(6)A 250V
绝缘电阻 Insulated resistance	≥100MΩ
接触电阻 Contact resistance	≤50mΩ
介电强度(极间) Dielectric strength	≥1500VAC/5S
电器寿命 Endurance	≥10000 Cycles
使用温度 Ambient temperature	T 85

8						UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7						MAT'L					
6						SEE NOTE		TITLE:	Rocker Switch		
5								DR:			
4						FINISH		CHKD:	RS601C1-101N011RB		
3						SEE NOTE		DWG NO.:			
2						Q'TY	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTE	APPD:	SCALE	SHEET	REV.
1									4:1	1/1	A
NO.	PARTS	MATERIAL	Q'TY	FINISHING							CUSTOMER DRAWING