




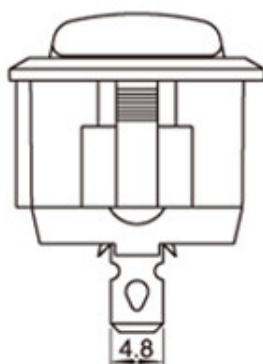



RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.

DIMENSIONS

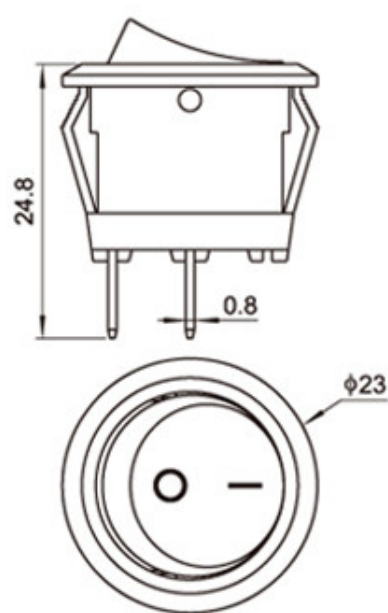

PANEL CUT-OUT		
Z	Y	X
0.70~1.25	20~20.1	2.1~2.2
1.25~2.00	20.1~20.2	2.1~2.2
2.00~3.00	20.2~20.3	2.1~2.2



技术要求

- 总装后表面光洁，无划伤、陷点，基座无裂痕；
- 按钮按动灵活、声音清脆，无卡滞、杂音等现象。

项 目	Item	参 数	Parameter
额定电流、电压 Rated voltage Rated current		10(6)A 250V	
绝缘电阻 Insulated resistance		$\geq 100M\Omega$	
接触电阻 Contact resistance		$\leq 50m\Omega$	
介电强度(极间) Dielectric strength		$\geq 1500VAC/5S$	
电器寿命 Endurance		≥ 10000 Cycles	
使用温度 Ambient temperature		T 85	

8						UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7						MAT'L					
6						SEE NOTE		TITLE:	Rocker Switch		
5						FINISH		DR:	DWG NO.:		
4						SEE NOTE		CHKD:	RS601C-1010011BB		
3						Q'TY		APPD:	SCALE	SHEET	REV.
2						THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTE		4:1	1/1	A	CUSTOMER
1											DRAWING
NO.	PARTS	MATERIAL	Q'TY	FINISHING							