





RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.

DIMENSIONS

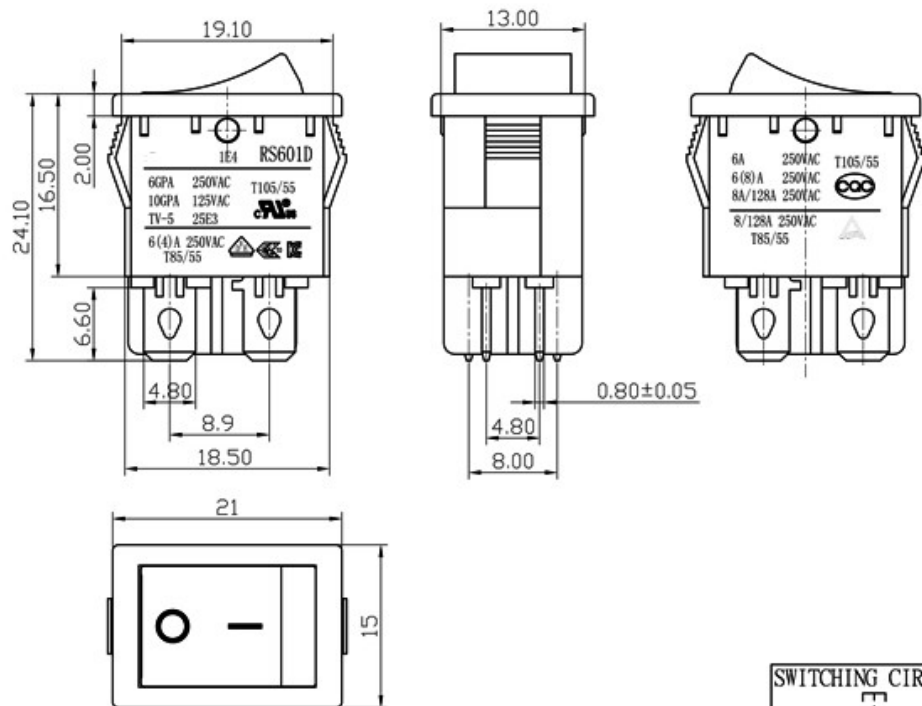

PANEL CUT-OUT		
Z	Y	X
0.70~1.25	12.90~13.10	18.9~19.1
1.25~2.00	12.90~13.10	19.1~19.2
2.00~3.00	12.90~13.10	19.3~19.4

NOTES:

1.Rating:

CQC 6A 250VAC 6(8)A 250VAC

8A/128A 250VAC T105/55

UL cUL 6GPA 250VAC

10GPA 125VAC

T105/55 TV-5

VDE ENEC 6(4)A 250VAC T85/55

KC 6(4)A 250VAC T85/55

TUV 8/128A 250VAC T85/55

2.Circuit Diagram:4P ON-OFF

3.Terminal Strength:≥80N

4.Electrical life:≥10000 cycles

5.Withstand Voltage:Withstand Voltage:1500VAC 1min


Terminals to Button:3000VAC 1min

Leakage Current:1mA

6.Current resistance:≤50mΩ(initial)

7.Insulation resistance:≥100MΩ

8.Body Materil:NYLON 66 94V-0~2



技术要求

- 总装后表面光洁，无划伤、陷点，基座无裂痕；
- 按钮按动灵活、声音清脆，无卡滞、杂音等现象。

项 目 Item	参 数 Parameter
额定电流、电压 Rated voltage Rated current	10(6)A 250V
绝缘电阻 Insulated resistance	≥100MΩ
接触电阻 Contact resistance	≤50mΩ
介电强度(极间) Dielectric strength	≥1500VAC/5S
电器寿命 Endurance	≥10000 Cycles
使用温度 Ambient temperature	T 85

8							UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED				
7							MAT'L					mm
6							SEE NOTE	TITLE:	PART NO.:			
5							FINISH	Rocker Switch				
4					SEE NOTE		DR:	DWG NO.:				
3					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTE		Q'TY	CHKD:	RS601D1-201N011RB			
2							APPD:	SCALE	SHEET	REV.	CUSTOMER	
1												
NO.	PARTS	MATERIAL		Q'TY	FINISHING				4:1	1/1	A	DRAWING