







RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS

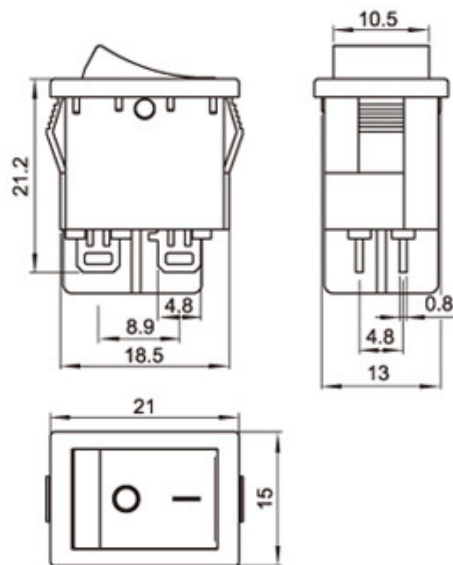

PANEL CUT-OUT		
Z	Y	X
0.70 ~ 1.25	12.9~13.1	18.9~19.1
1.25 ~ 2.00	12.9~13.1	19.1~19.2
2.00 ~ 3.00	12.9~13.1	19.3~19.4



技 术 要 求

- 总装后表面光洁，无划伤、陷点，基座无裂痕；
- 按钮按动灵活、声音清脆，无卡滞、杂音等现象。

项 目	Item	参 数	Parameter
额定电流、电压 Rated voltage Rated current		10(6)A	250V
绝缘电阻 Insulated resistance		≥100MΩ	
接触电阻 Contact resistance		≤50mΩ	
介电强度(极间) Dielectric strength		≥1500VAC/5S	
电器寿命 Endurance		≥10000 Cycles	
使用温度 Ambient temperature		T 85	

8						UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7						MAT'L					
6						SEE NOTE		TITLE:	Rocker Switch		
5						FINISH		DR:	DWG NO.:		
4						SEE NOTE		CHKD:	RS601D1-2010019BB		
3						Q'TY		APPD:	SCALE	SHEET	REV.
2						THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTE			4:1	1/1	A
1											CUSTOMER
NO.	PARTS	MATERIAL	Q'TY	FINISHING							DRAWING