






RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.

DIMENSIONS

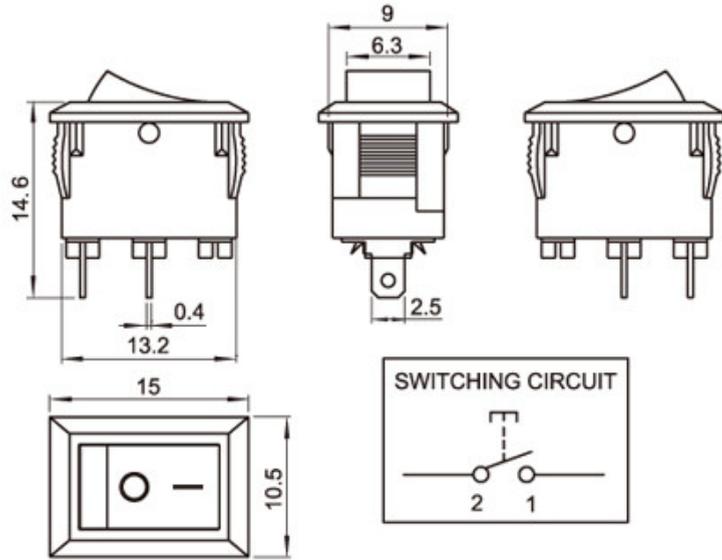

PANEL CUT-OUT		
Z	Y	X
0.70~1.25	9.00~9.10	13.5~13.6
1.25~2.00	9.00~9.10	13.6~13.7



技术要求

1. 总装后表面光洁，无划伤、陷点，基座无裂痕；
2. 按钮按动灵活、声音清脆，无卡滞、杂音等现象。

项目 Item	参数 Parameter
额定电流、电压 Rated voltage Rated current	3A250V 6A125V
绝缘电阻 Insulated resistance	≥100MΩ
接触电阻 Contact resistance	≤50mΩ
介电强度(极间) Dielectric strength	≥1500VAC/5S
电器寿命 Endurance	≥10000 Cycles
使用温度 Ambient temperature	T 85

8						UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7						MAT'L		TITLE:		PART NO.:	
6						SEE NOTE		Rocker Switch			
5						FINISH		DR:		DWG NO.:	
4						SEE NOTE				RS601HL-1010012BB	
3						Q'TY		CHKD:		SCALE SHEET REV. CUSTOMER	
2								APPD:		4:1 1/1 A DRAWING	
1	NO.	PARTS	MATERIAL	Q'TY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTE					