





RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS

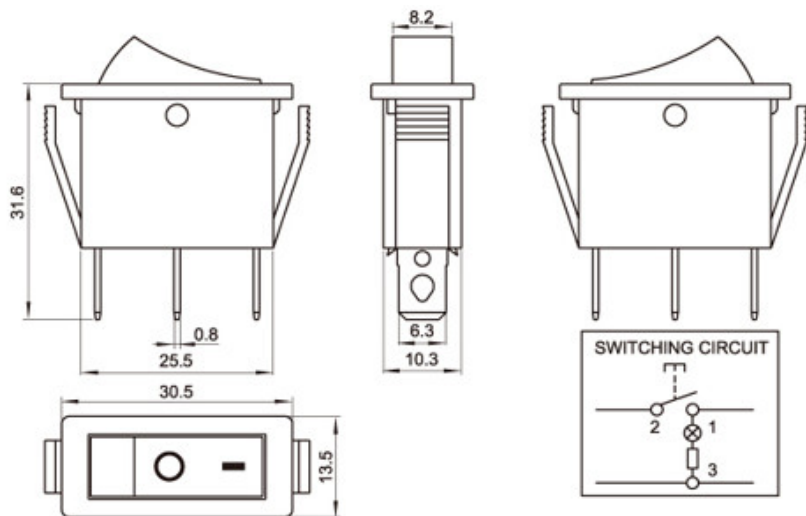

PANEL CUT-OUT		
Z	Y	X
0.70~1.25	10.5~10.7	28.9~29.1
1.25~2.00	10.5~10.7	29.1~29.2
2.00~3.00	10.5~10.7	29.2~29.3



技术要求

- 总装后表面光洁，无划伤、陷点，基座无裂痕；
- 按钮按动灵活、声音清脆，无卡滞、杂音等现象。

项 目	Item	参 数	Parameter
额定电流、电压 Rated voltage Rated current		15250V20A125V	
绝缘电阻 Insulated resistance		≥100MΩ	
接触电阻 Contact resistance		≤50mΩ	
介电强度(极间) Dielectric strength		≥1500VAC/5S	
电器寿命 Endurance		≥10000 Cycles	
使用温度 Ambient temperature		T 85	

8						UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED					
7						MAT'L		TITLE: Rocker Switch		PART NO.:			
6						SEE NOTE							
5						FINISH		DR:		DWG NO.:			
4													SEE NOTE
3						Q'TY		CHKD:		RS606-101N011CRB			
2													
1						THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTE		APPD:		SCALE	SHEET	REV.	CUSTOMER
NO.	PARTS	MATERIAL	Q'TY	FINISHING							4:1	1/1	A