


CIRCUIT DIAGRAM

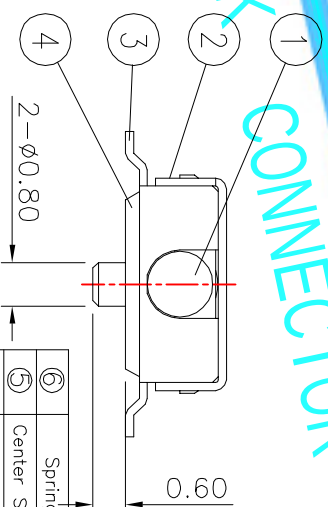

CONNECTOR

NOTE:
Rating: DC 12V 50mA
Operating Force: 120 ± 30 gf
Lifetime: 100,000 Cycles

3.00±0.1

3.40

3.75

Un starting position

4

2-φ0.80

NOTE:

Rating: DC 12V 50mA

Operating Force: 120±30gf

Lifetime: 100,000 Cycles

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑥	Spring	—	1	SUS	Natural	—
⑤	Center Spring	—	1	Phosphor Bronze	Ag Plated	—
④	Base	—	1	PA46	Black	—
③	Terminal	—	4	Phosphor Bronze	Ag Plated	—
②	Cover	—	1	SUS	Natural	—
①	Knob	—	1	PA46	Black	—

APPROVALS		DATE		LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
DRAWN	J.X.Zhong		2013/9/22				
CHECKED				TITLE:		DETECTOR SWITCHS	
APPROVALS				PART NO.		K5-1624SA-01	
TOLERANCES ARE				SCALE: 1:1		PROJ.	
30~12.5	±0.30	ANGLE		UNIT: mm		DRAWING NO.	SHEET 1 of 1
10~30	±0.20						
5~10	±0.15						
~ 5	±0.10						