



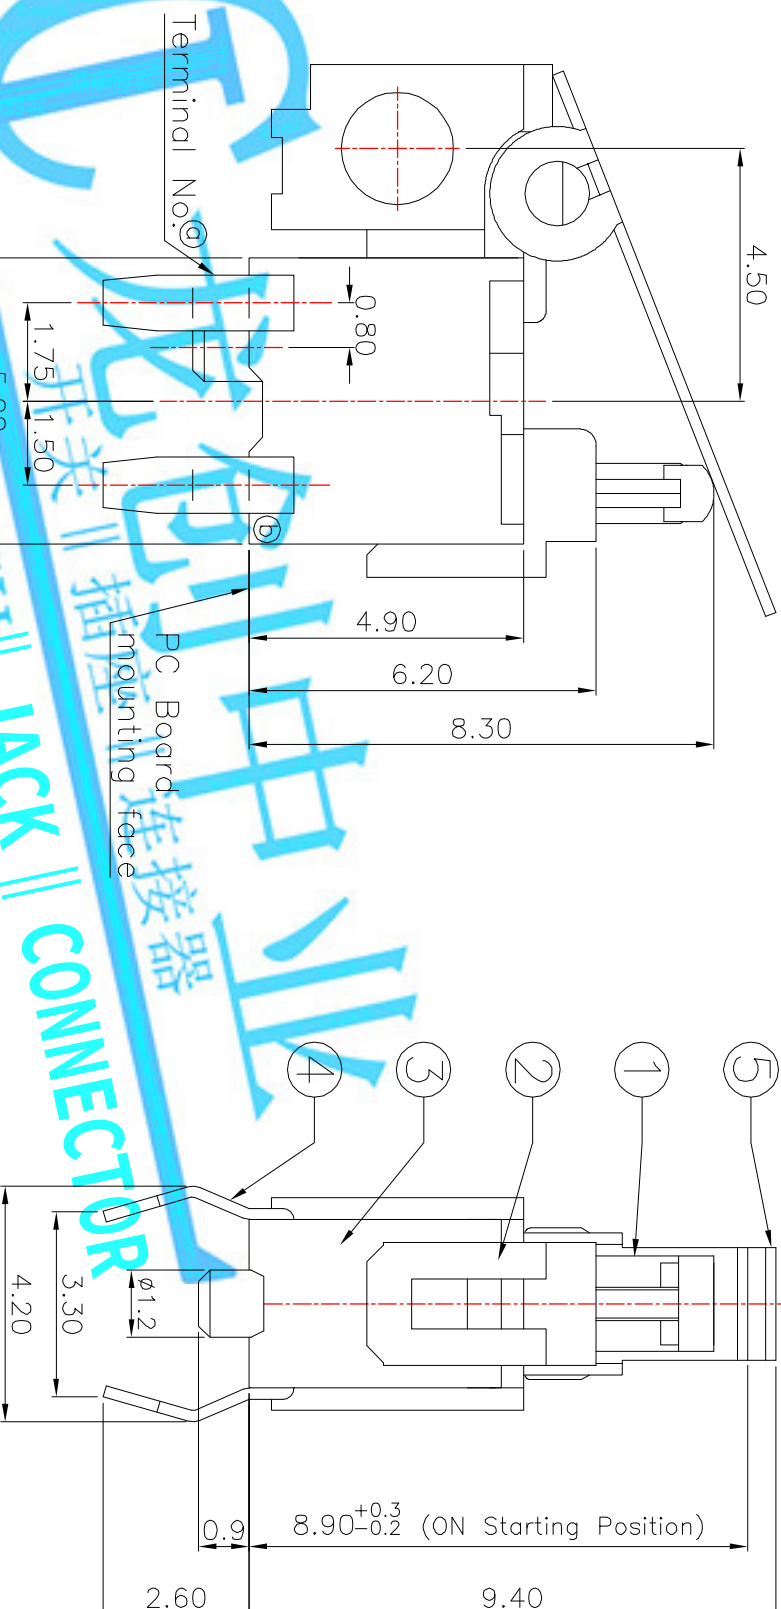

NOTE:
Rating: DC 30V 0.1A
Operating Force: 30 ± 10 gf
Lifetime: 50,000 Cycles

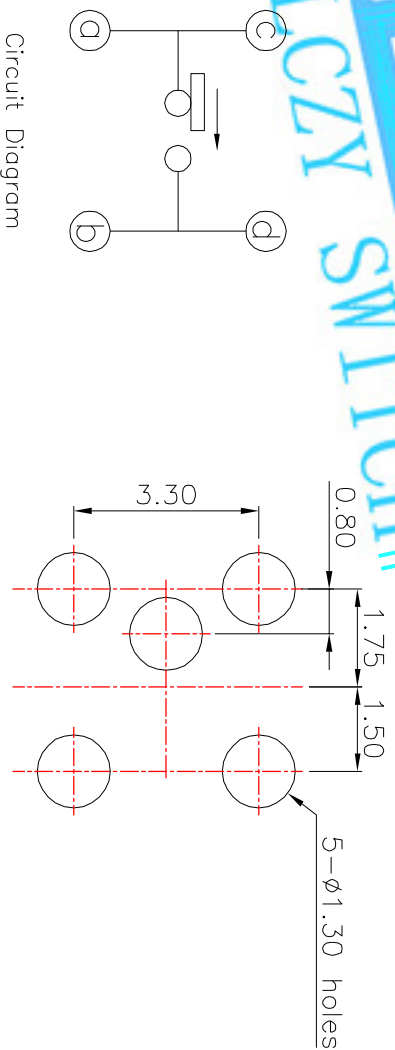

ITEM	PART NAME	TER.NO.	QTY.	MATERIAL	FINISHING	REMARK
⑥	Contact Spring	—	1	Phosphor Bronze	Ag Plated	—
⑤	Lever	—	1	SUS	Natural	—
④	Terminal	—	4	Phosphor Bronze	Ag Plated	—
③	Base	—	1	PA46	Black	—
②	Cover	—	1	PA46	Black	—
①	Knob	—	1	PA46	Black	—

APPROVALS		DATE	LONGCHUANG ZHONGYE (HK)CO.,LIMITED
DRAWN	J.X.Zhang	2013/9/11	

					CHECKED			TITLE:	DETECTOR SWITCHES			
					APPROVALS			PART NO.	K5-1626DA-01			
	A		NEW					UNIT: mm	SCALE: 1:1			
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.	TOLERANCES ARE	30~ ϕ LH 10~30 5~10 ~5	$\pm$ 0.30 $\pm$ 0.20 $\pm$ 0.15 $\pm$ 0.10	ANGLE $\pm$ 2°	DRAWING NO.	SHEET 1 of 1