




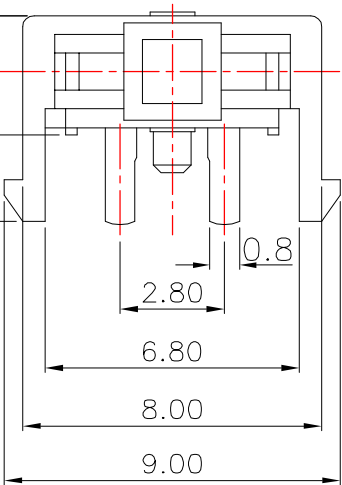

CIRCUIT DIRGRAM

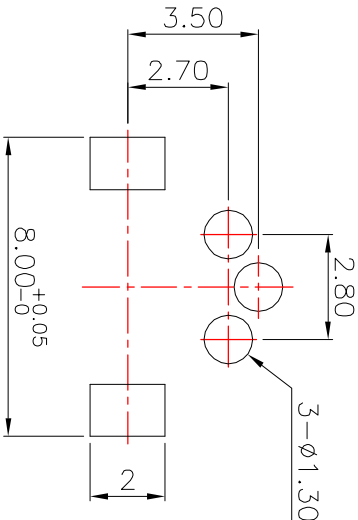

PCB Layout(pattern side)

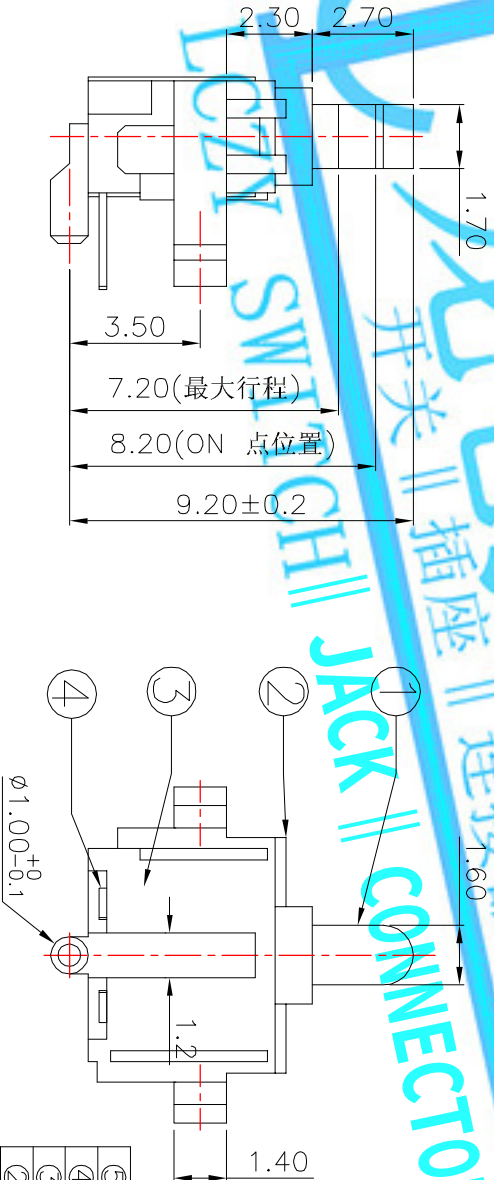

NOTE:
Rating: DC 30V 0.1A
Operating Force: 50±10gf
Lifetime: 50,000 Cycles

⑤	Spring	—	1	Beryllium copper	Ag Plated	—
④	Terminal	—	2	Phosphor Bronze	Ag Plated	—
③	Base	—	1	NYLON	Black	—
②	Cover	—	1	NYLON	Black	—
①	Slider	—	1	NYLON	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS		DATE	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
DRAWN	J.X.Zhang	2013/9/24				

CHECKED		TITLE: DETECTOR SWITCHS				
APPROVALS		PART NO.		K5-1629DA-01		
TOLERANCES ARE		30~12.5 ±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: ①
		10~30 ±0.20				
		5~10 ±0.15				
		~5 ±0.10	±2'	DRAWING NO.		SHEET 1 OF 1
ECN NO.	REV.	DATE.	DESCRIPTION.			
	A		NEW			