

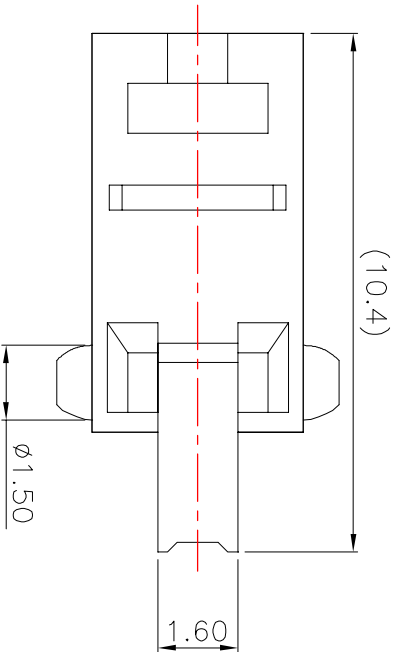
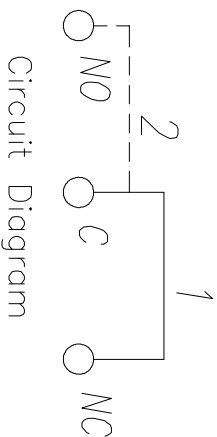


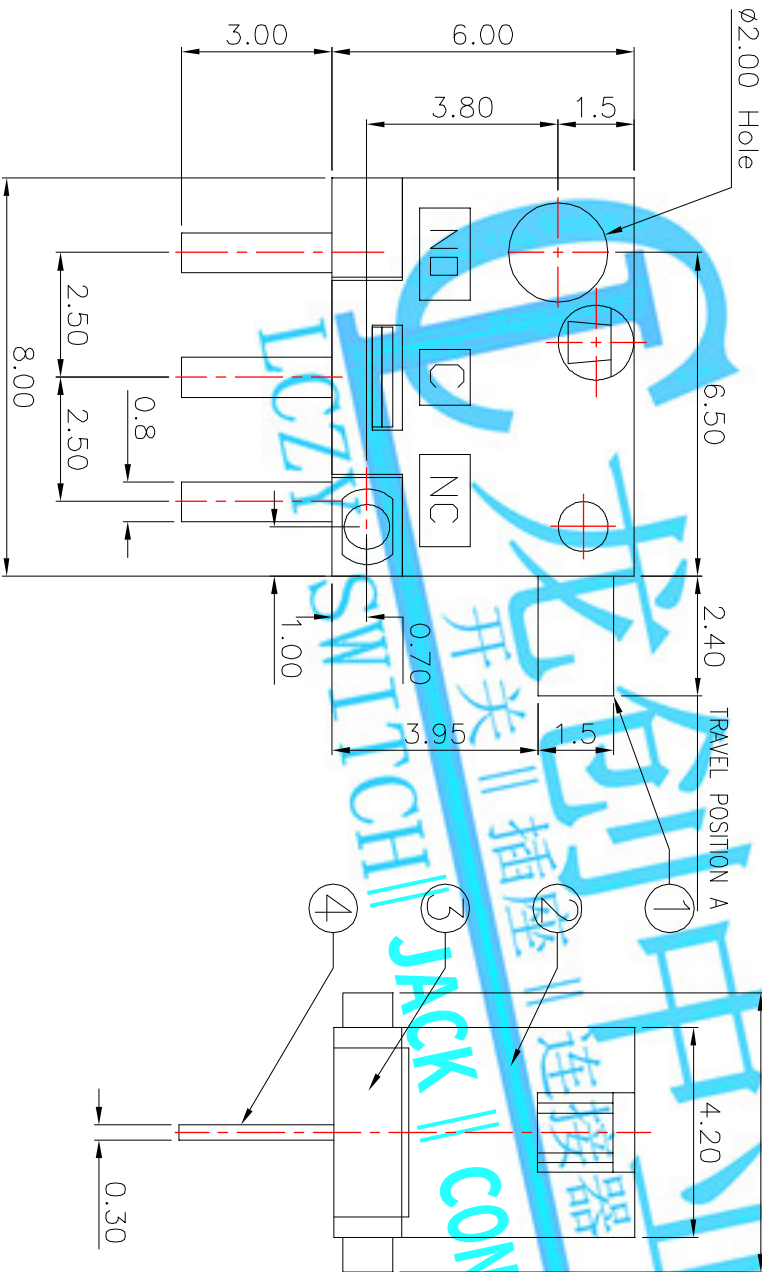

SWITCHING SEQUENCE	
C ↔ NO	ON OFF
C ↔ NC	OFF ON

TRAVEL POSITION A
0 0.8 1.5 2.4

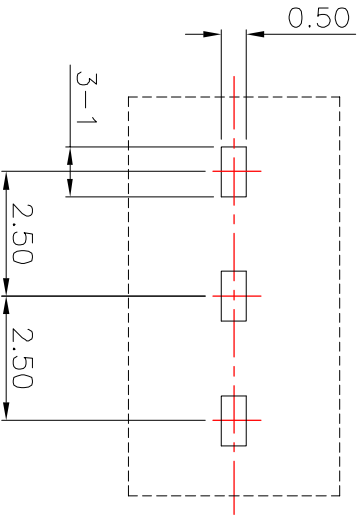

NOTE:
Operating Force: 60±20gf

⑥	Spring	—	1	SUS	Natural	—
⑤	Contact Spring	—	1	Phosphor Bronze	Ag Plated	—
④	Terminal	—	3	Phosphor Bronze	Ag Plated	—
③	Base	—	1	NYLON	Black	—
②	Cover	—	1	NYLON	Black	—
①	Knob	—	1	NYLON	White	—
ITEM	PART NAME	TER.NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS		DATE	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
DRAWN	J.X.Zhang	2013/9/13				

CHECKED		TITLE:		DETECTOR SWITCHS		
APPROVALS		PART NO.		K5-1636DA-01		
TOLERANCES ARE		30~12.5	±0.30	ANGLE	UNIT: mm	SCALE: 1:1
		10~30	±0.20			PROJ: ①
		5~10	±0.15			SHEET 1 OF 1
		~ 5	±0.10	±2°	DRAWING NO.	
ECN NO.	REV.	DATE.	DESCRIPTION.			
	A		NEW			
			CHANGE.			
			CHECK.			
			APPRO.			