

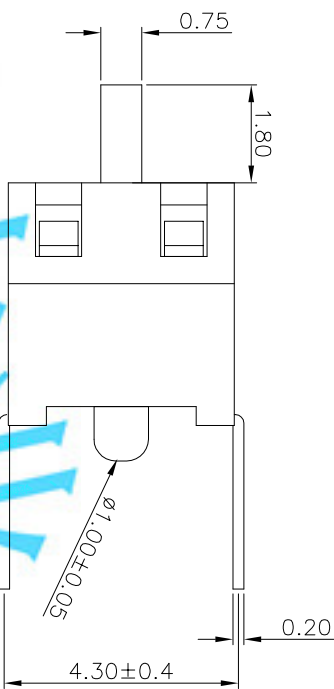
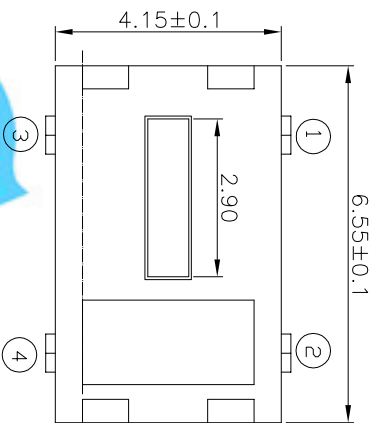


CIRCUIT DIAGRAM

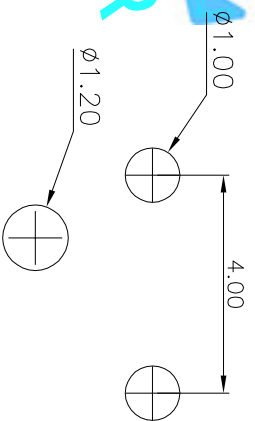

PCB LAND DIMENSION

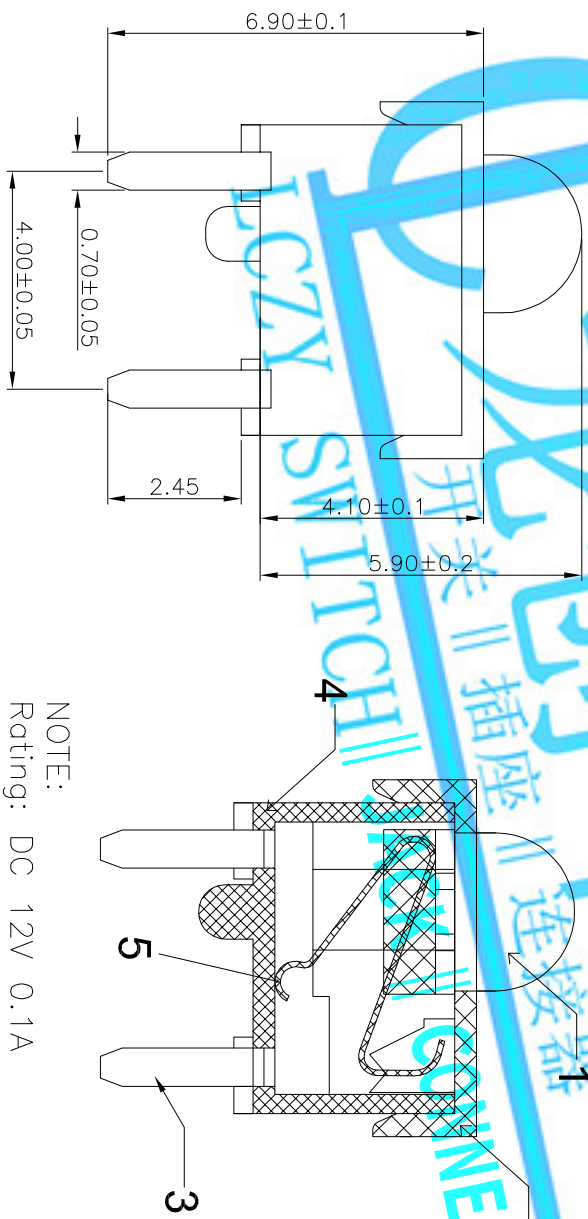

NOTE:
Rating: DC 12V 0.1A
Operating Force: 40±15gf
Lifetime: 50,000 Cycles
Travel: 0.5±0.2mm
MAX Travel: 1.8±0.2mm

⑤	Center Spring	—	1	Phosphor Bronze	Ag Plated	—
④	Base	—	1	PPA	Black	—
③	Terminal	—	4	Phosphor Bronze	Ag Plated	—
②	Cover	—	1	PA46	Natural	—
①	Knob	—	1	PA46	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS		DATE	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
DRAWN	J.X.Zhang	2018/8/1				

CHECKED		TITLE:		DETECTOR SWITCHS		
APPROVALS		PART NO.		K5-1669DA-01		
TOLERANCES ARE		30~80±	±0.30	ANGLE	UNIT: mm	SCALE: 1:1
		10~30	±0.20			PROJ:
		5~10	±0.15			
		~ 5	±0.10	±2°	DRAWING NO.	SHEET 1 OF 1
ECN NO.	REV.	DATE.	DESCRIPTION.			
	A		NEW			