





REV.	ECN. NO.	APPD.

DIMENSIONS

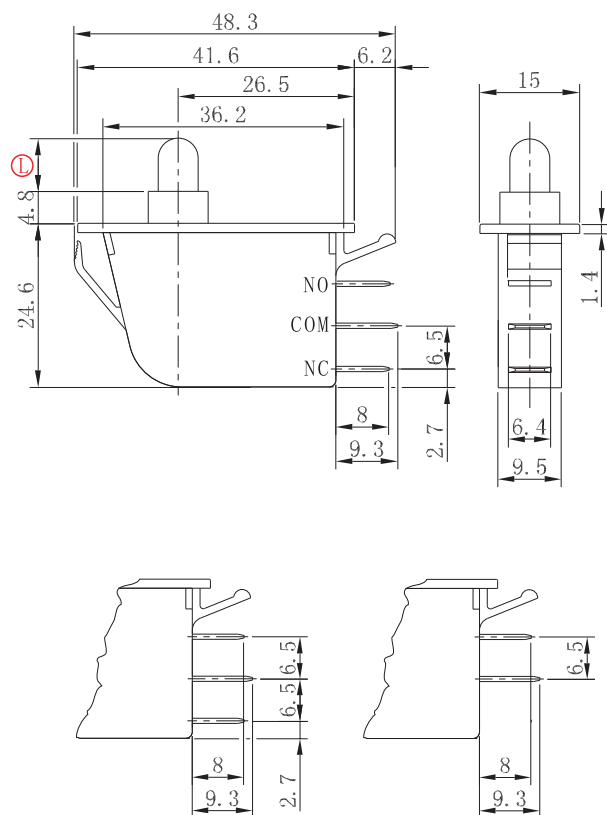


外形尺寸图Overall Dimension(mm)

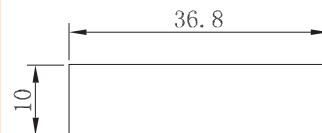

安装面板厚度:1~2.8mm
panel thickness

开孔尺寸Panel Cut out(mm)

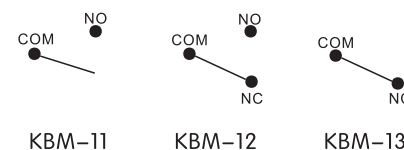

电路图Circuit

单极常开 NO.	单极常开常闭 NO.&NC.	单极常闭 NC.
KBM-111	KBM-121	KBM-131
KBM-112	KBM-122	KBM-132
KBM-113	KBM-123	KBM-133
KBM-114	KBM-124	KBM-134
KBM-115	KBM-125	KBM-135

注:本产品默认颜色为白色, 其他颜色及特殊型号请联系本公司。

Note: This product is the default color is white, other colors and special models, please contact the Company.

型号列表Model List

项 目	Item	参 数	Parameter
额定电流、电压 Rated voltage Rated current		3A	250V
绝缘电阻 Insulated resistance		$\geq 100M\Omega$	
接触电阻 Contact resistance		$\leq 50m\Omega$	
介电强度(极间) Dielectric strength		$\geq 1500VAC/5S$	
电器寿命 Endurance		≥ 10000	Cycles
使用温度 Ambient temperature		T	85

8					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCRATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTE	UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED				
7						mm					
6						MAT'L					
5						SEE NOTE	TITLE:	PART NO.:			
4							Appliance Switch				
3						FINISH	DR:	DWG NO.:			
2						SEE NOTE	CHKD:	KBM-X114-A-B-			
1						Q'TY		SCALE	SHEET	REV.	CUSTOMER DRAWING
NO.	PARTS	MATERIAL	Q'TY	FINISHING		APPD:	4:1	1/1	A		