



RoHS
Compliant
2002/95/EC



REV.	ECN.	NO.	APPD.

DIMENSIONS

NIR16

形状种类: R
Shape type

端子种类: A
Terminal type

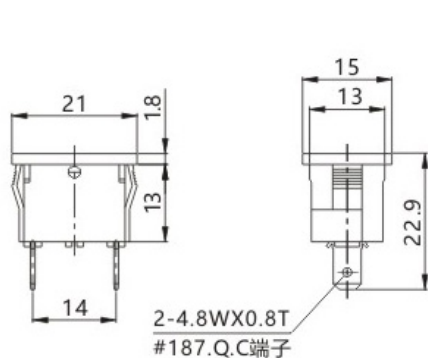

安装孔尺寸
MOUNTING HOLE DIMENTION

t	X	Y
0.75-1.25	19.6 ₀ ^{+0.1}	13.1 ₀ ^{+0.1}
1.25-2.00	19.7 ₀ ^{+0.1}	13.1 ₀ ^{+0.1}
2.00-3.00	19.8 ₀ ^{+0.1}	13.1 ₀ ^{+0.1}

t为材料厚度
Panel Thicknesss

项 目	Item	参 数	Parameter
额定电流、电压	Rated voltage	10(16)A 250V	
	Rated current		
绝缘电阻	Insulated resistance	$\geq 100\text{M}\Omega$	
接触电阻	Contact resistance	$\leq 50\text{m}\Omega$	
介电强度(极间)	Dielectric strength	$\geq 1500\text{VAC}/5\text{S}$	
电器寿命	Endurance	≥ 10000	Cycles
使用温度	Ambient temperature	T 85	

8					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTE	UNITS		LONGCHUANG ZHONGYE (HK)CO.,LIMITED					
7						mm							
6						MAT'L							
5						SEE NOTE		TITLE:		PART NO.:			
4								Appliance Switch					
3						FINISH		DR:		DWG NO.:			
2						SEE NOTE				NIR16			
1						Q'TY	CHKD:		SCALE		SHEET	REV.	CUSTOMER
NO.	PARTS	MATERIAL		Q'TY	FINISHING		APPD:		4:1		1/1	A	DRAWING