



RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.



DIMENSIONS

PS10-16-A

回路类型:一回路
二回路

Circuit:one circuit
two circuit

操作类型:A、R
Operating type

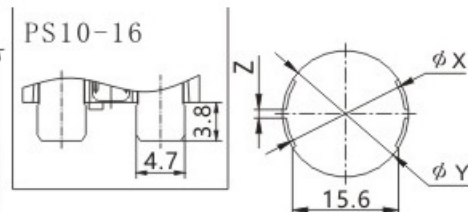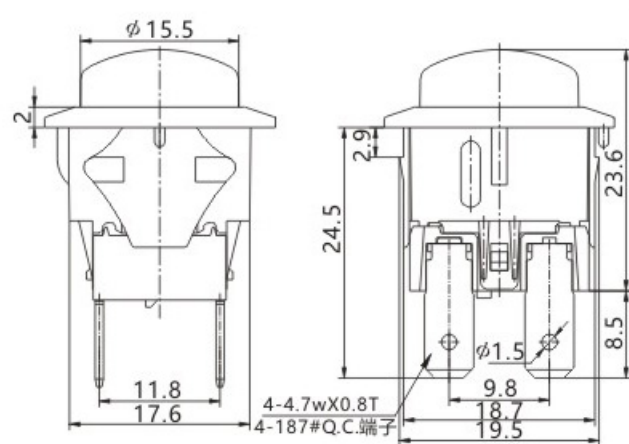

安装孔尺寸
MOUNTING HOLE DIMENTION

t	X	Y	Z
0.8-1.5	18.6 ^{+0.1} ₋₀	19.8 ^{+0.1} ₋₀	1.7 ^{+0.1} ₋₀
1.5-2.9	18.8 ^{+0.1} ₋₀	20 ^{+0.1} ₋₀	1.9 ^{+0.1} ₋₀

t: 安装面板厚度(PanelThickness)

项 目 Item	参 数 Parameter
额定电流、电压 Rated voltage Rated current	10(16)A 250V
绝缘电阻 Insulated resistance	≥100MΩ
接触电阻 Contact resistance	≤50mΩ
介电强度(极间) Dielectric strength	≥1500VAC/5S
电器寿命 Endurance	≥10000 Cycles
使用温度 Ambient temperature	T 85

8								UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED				
7								MAT'L						
6								SEE NOTE		TITLE:	PART NO.:			
5										Appliance Switch				
4								FINISH		DR:	DWG NO. PS10-16-A			
3								SEE NOTE						
2						THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTE		Q'TY		CHKD:				
1														
NO.	PARTS	MATERIAL		Q'TY	FINISHING				—	APPD:	4:1	1/1	A	CUSTOMER DRAWING