



RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.



DIMENSIONS

PS23-16-A

回路类型:一回路
二回路

Circuit:one circuit
two circuit

操作类型:A、R
Operating type

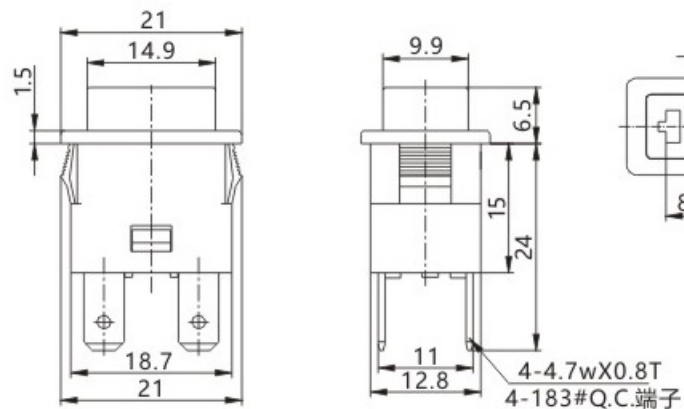

t	X	Y
0.8-1.5	$19^{+0.1}_{-0}$	$13^{+0.1}_{-0}$

t: 安装面板厚度
(Panel Thickness)

项 目	Item	参 数	Parameter
额定电流、电压 Rated voltage Rated current		10(16)A 250V	
绝缘电阻 Insulated resistance		$\geq 100M\Omega$	
接触电阻 Contact resistance		$\leq 50m\Omega$	
介电强度(极间) Dielectric strength		$\geq 1500VAC/5S$	
电器寿命 Endurance		≥ 10000 Cycles	
使用温度 Ambient temperature		T 85	

8					UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7					MAT'L					
6					SEE NOTE		TITLE:	PART NO.:		
5							Appliance Switch			
4					FINISH		DR:	DWG NO.:		
3					SEE NOTE			PS23-16-A		
2					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTE	Q'TY	CHKD:	SCALE	SHEET	REV.
1							APPD:	4:1	1/1	A
NO.	PARTS	MATERIAL	Q'TY	FINISHING				CUSTOMER	DRAWING	