



RoHS
Compliant
2002/95/EC




REV.	ECN.	NO.	APPD.

DIMENSIONS

PS46

回路类型:一回路
Circuit:one circuit

操作类型:R
Operating type

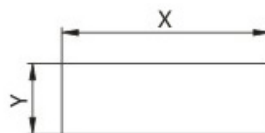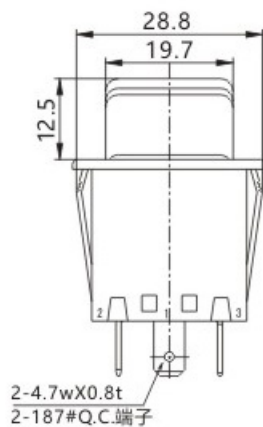

安装孔尺寸
MOUNTING HOLE DIMENTION

t	X	Y
2	$27.5^{+0.1}_{-0}$	$8.2^{+0.1}_{-0}$
2.5	$28^{+0.1}_{-0}$	$8.2^{+0.1}_{-0}$

t: 安装面板厚度 (Panel Thickness)

项 目 Item	参 数 Parameter
额定电流、电压 Rated voltage Rated current	10(16)A 250V
绝缘电阻 Insulated resistance	$\geq 100M\Omega$
接触电阻 Contact resistance	$\leq 50m\Omega$
介电强度 (极间) Dielectric strength	$\geq 1500VAC/5S$
电器寿命 Endurance	≥ 10000 Cycles
使用温度 Ambient temperature	T 85

8						UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED					
7						mm						
6						MAT'L	TITLE: Appliance Switch				PART NO.:	
5						SEE NOTE						
4						FINISH	DR:				DWG NO.:	
3						SEE NOTE						
2					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTE	Q'TY	CHKD:				PS46	
1												
NO.	PARTS	MATERIAL	Q'TY	FINISHING			APPD:	SCALE	SHEET	REV.	CUSTOMER DRAWING	