



DIMENSIONS

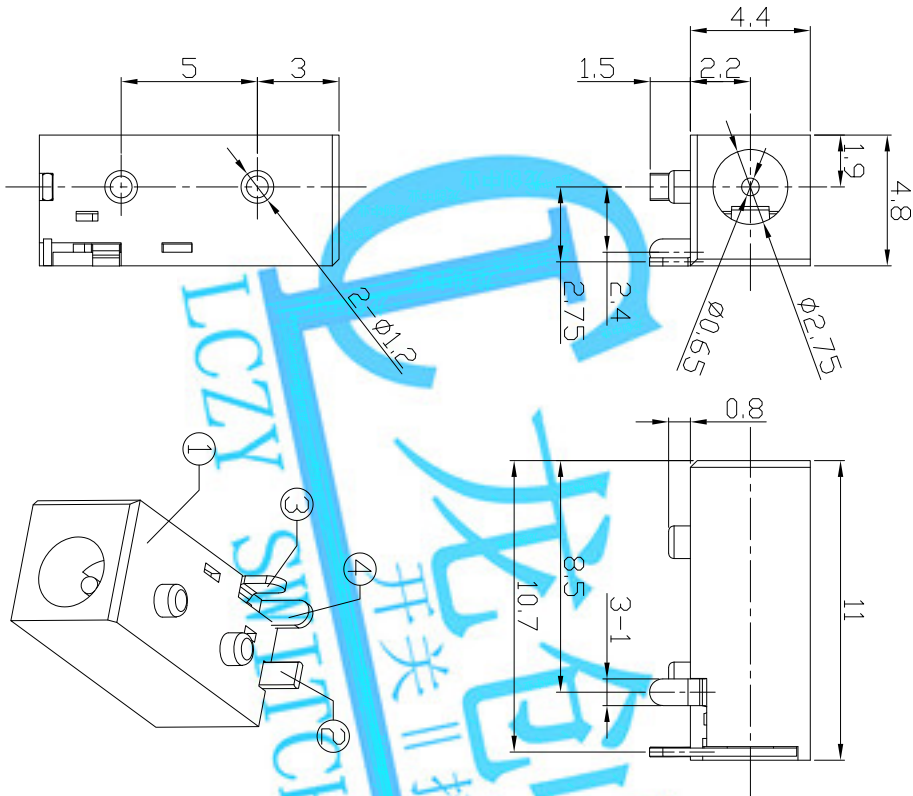

- MODEL CODE:
- DCB0-00930- A A PB BK S 0 4
- (1) (2) (3)(4) (5) (6) (7)(8) (9)
- (1):Series type:DIP DC POWER JACK.
- (2):Series No.
- (3):Schematic option: A , B
- (4):Center pin diameter:
- A= $\phi 0.65$
- (5):Material of housing:
- PB=PBT (Standard)
- (6):Housing color:
- BK=Black (Standard)
- (7):Terminal plating
- S=Silver(Ag)
- (8):Special option:
- 0=No special option
- (9):Packing mode:
- 4=Bag packing

- SPECIFICATION:
- 1.Rating : DC 30V 0.5A;
- 2.Contact resistance: $\leq 30m\Omega$;
- 3.Insulation resistance: $\geq 100M\Omega$ (DC500V);
- 4.Withstand voltage: 500VAC ;
- 5.Insertion and extraction force: 3-30N;
- 6.life test: 5,000 cycles;
- 7.Operation temperature range:-20°C~70°C;
- 8.Preservative temperature range:-40°C~85°C;

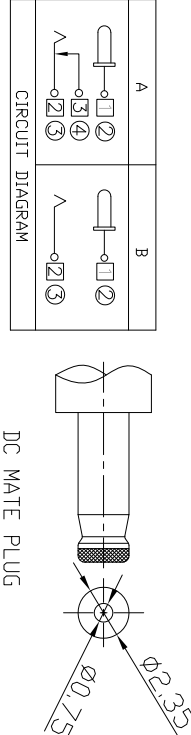

○:ITEM NO. □:TERMINAL NO.

E																										
						TOLERANCE				ANGLES		UNITS		mm		龙创中业电子科技（东莞）有限公司										
																	TITLE:									
																	DIP DC POWER JACK									
④	Shunt terminal	Brass t=0.3	1	Ag-Plating													PART NO.: DCB0-00930									
③	Tip spring	Bronze t=0.3	1	Ag-Plating													DWG NO.: AB0-00930									
②	Center pin	Bronze	1	Ag-Plating													SCALE SHEET REV. CUSTOMER DRAWING									
①	Housing	PBT UL94V-0	1														CHKD: Rocky 2019/05/03									
ND.	PARTS	MATERIAL	Q'TY	FINISHING													APPD:									
																	1:1 1/1 A									
																	7									

龙创中业电子科技 (东莞) 有限公司