
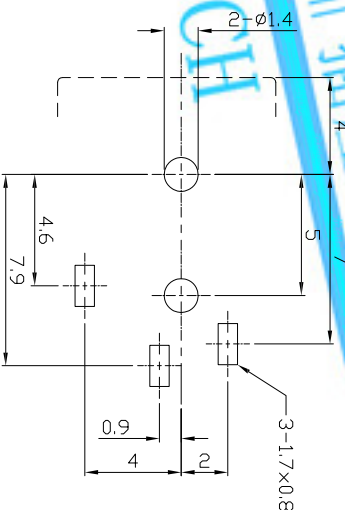
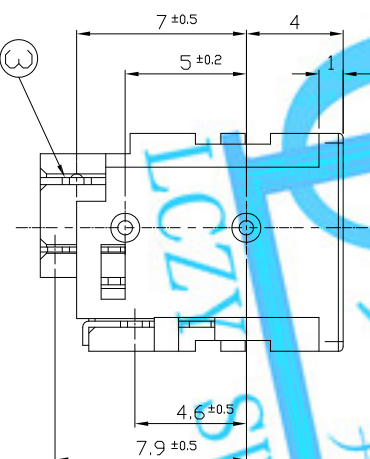
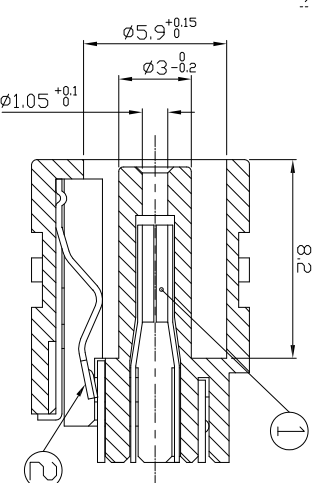
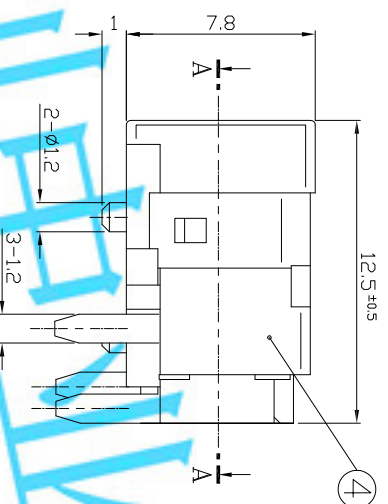
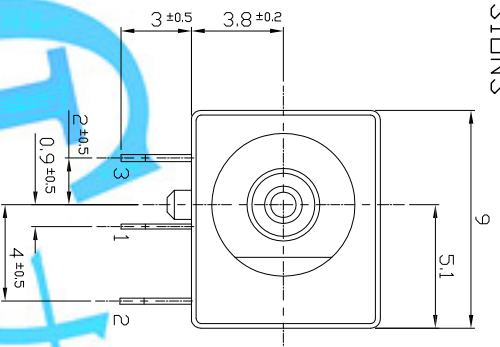


MODEL CODE:
~~DCDD-39000-~~ A C PB BK S 0 4
 (1) (2) (3) (4) (5) (6) (7) (8) (9)
 (1):Series type:DC POWER JACK.
 (2):Series No.
 (3):Schematic option: A
 (4):Center pin diameter:
 C=∅0.95mm
 (5):Material of housing:
 PB=PB
 (6):Housing color:
 BK=Black
 (7):Terminal plating:
 S=Silver(Ag)
 (8):Special option:
 0=No special option
 (9):Packing mode:
 4=Bag packing

Specification:

- 1.Rating : DC 13.5V 2A,
- 2.Contact resistance : $\leq 30\text{m}\Omega$
- 3.Insulation resistance : $\geq 100\text{M}\Omega$ (500V DC),
- 4.Withstanding voltage : 500VAC,
- 5.Insertion and extraction force : 0.3~3Kgs
- 6.Life test : 5,000 cycles min,
- 7.Operation temperature range:-25°C~70°C

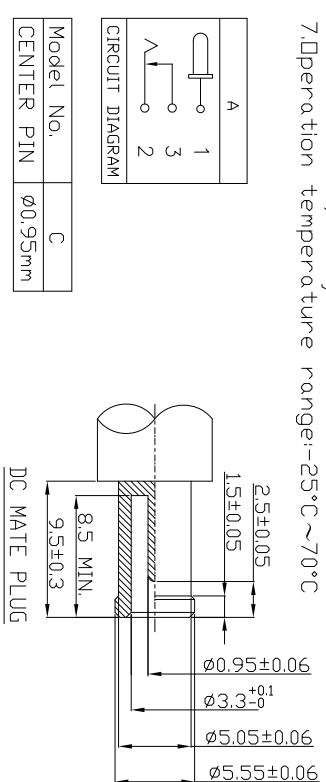

龙创中业电子科技有限公司（东莞）有限公司									
TITLE: DC POWER JACK				PART NO.:		DWG NO.: AD0-39000			
				DCD0-39000					
④		CASING	PBT/GF RESIN	1	UL94V-0	TOLERANCE		ANGLES	
③		FIXED TERMINAL	BRASS	0.3t	1	Ag-PLATED	X<=±0.10	UNITS mm	
②		TIP SPRING	COPPER ALLOY	0.25t	1	Ag-PLATED	X> ±0.30	FINISH	
①		EARTH PIN	PBS	0.2t	1	Ag-PLATED	SEE NOTE		
ND.		PARTS	MATERIAL	Q'TY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LONGCHUANGONGYE ELECTRONIC CO., LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVATECH INC.			
				Q'TY		SCALE		SHEET	
				APPD:		1:1		A	
								CUSTOMER DRAWING	