


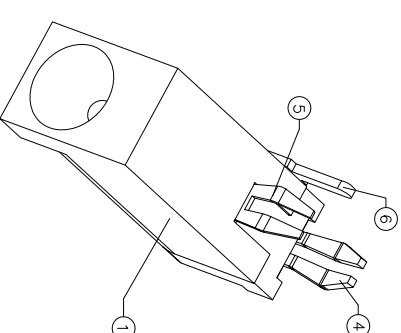


DIMENSIONS

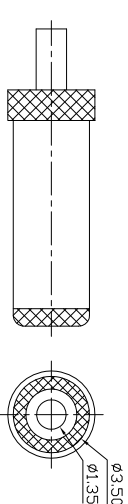

RECOMMENDED P.C.B. LAYOUT
UNSPECIFIED TOLERANCE:±0.05
(TOP VIEW)



MODEL CODE:
DCB0-0002H-A E PB BK S 0 4
 (1) (2) (3)(4)(5) (6) (7)(8) (9)
 (1):Series type:DIP DC POWER JACK
 (2):Series No.
 (3):Schematic option: A
 (4):Center pin diameter:
 E=ø1.30
 (5):Material of housing:
 PB=PBT (Standard)
 (6):Housing color:
 BK=Black
 (7):Terminal plating
 S=Silver(Ag)
 (8):Special option:
 0=No special option
 (9):Packing mode:
 4=Bag packing

REV.	ECN. NO.	APPD.

LONGCHUANG ZHONGYE (HK)CO.,LIMITED									
TITLE:				PART NO.:					
DIP DC POWER JACK				DCB0-0002H					
DR: <i>Rocky</i> 2019/03/04				DWG NO.: ABO-0002H					
CHKD: <i>Rocky</i> 2019/03/04									
APPD:				SCALE SHEET REV. CUSTOMER DRAWING					
				1:1 1/1 A					
⑥	Shunt terminal ③	Copper Alloy	1	Silver Plating	TOLERANCE	ANGLES	UNITS		
⑤	Tip spring ②	Stainless steel	1	Silver Plating	±0.3	±2°	MAT'L		
④	Center pin terminal ①	Copper Alloy	1	Silver Plating			SEE NOTE		
③	Center pin	Copper Alloy	1	Nickel plating			FINISH		
②	Cover	Thermoplastic	1	Black			SEE NOTE		
①	Housing	Thermoplastic	1	Black			Q'TY		
N.D.	PARTS MATERIAL		Q'TY	FINISHING					
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LONGCHUANG ZHONGYE (HK)CO.,LIMITED AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INVENTECH INC.									