
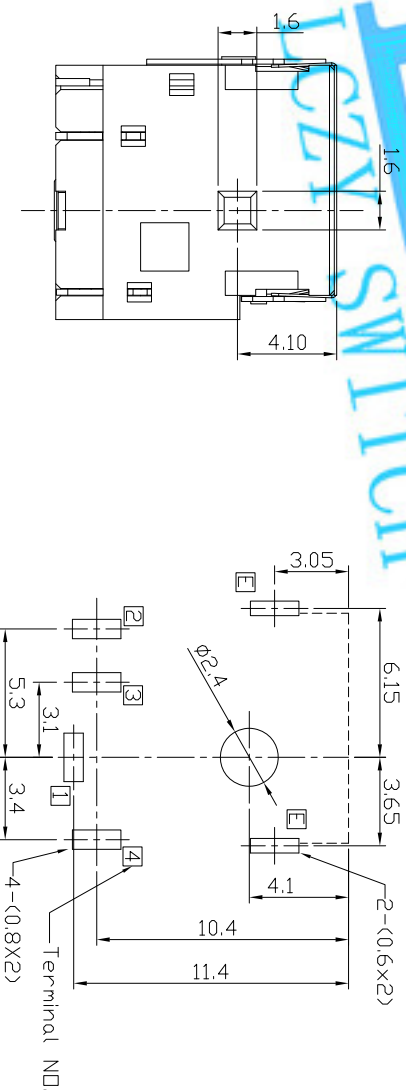


DIMENSIONS

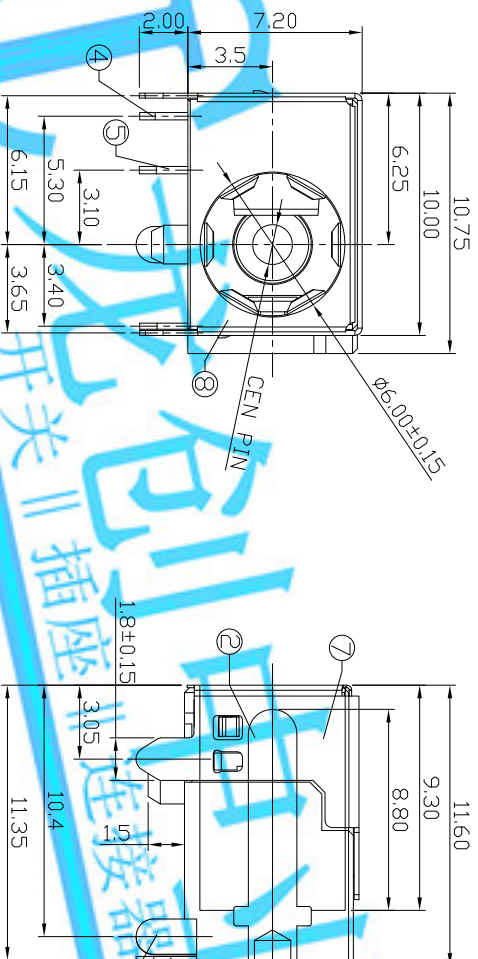

O: ITEM NO. □: TERMINAL NO.

PCB HOLES(BOTTOM VIEW) t=1.6mm
NOTE:GENERAL TOLERANCE:±0.05mm

[illegible]



MODEL CODE:

DCBO-0044L-C □ 9T BK S 0 1

- (1)Series type:DIP DC POWER JACK.
- (2):Series No.
- (3):Schematic option: A , B , C , D
- (4):Center pin diameter:
G=ø1.65 , H=ø2.0 , J=ø2.5
- (5):Material of housing:
9T=PA9T (Standard) , 10=PA10T
- (6):Housing color:
BK=Black(Standard)
- (7):Terminal plating
S=Silver(Ag=20u")
- (8):Special option:
0=No special option
H=Halogen Free
- (9):Packing mode:
1=Reel packing
A=Reel packing(□posite)

SPECIFICATION:

- 1.Rating : DC 20V 5A;
- 2.Contact resistance: $\leq 30\text{m}\Omega$;
After test: $\leq 50\text{m}\Omega$
- 3.Insulation resistance: $\geq 100\text{M}\Omega$ (DC500V);
After test: $\geq 50\text{M}\Omega$
- 4.Withstand voltage: 500VAC ;
- 5.Insertion and extraction force: 3-30N;
- 6.Life test: 5,000 cycles;
- 7.Operation temperature range:-20°C~70°C;
- 8.Preservation temperature range:-40°C~85°C;

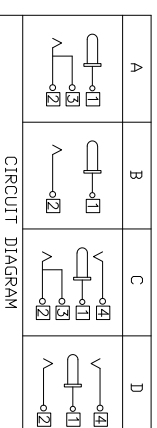

DC MATE PLUG

Model No.	G	H	J
CENTER PIN	Ø1.65	Ø2.0	Ø2.5

LONGCHUANG ZHONGYE (HK) CO., LIMITED

LE:	PART NO.:
DIP DC POWER JACK	DCB0-0044L

: <i>Ricky</i> 2019/04/29	DWG NO.: AB0-0044L
------------------------------	-----------------------

SCALE	SHEET	REV.	CUSTOMER DRAWING
1:1	1/1	A	