


DIMENSIONS

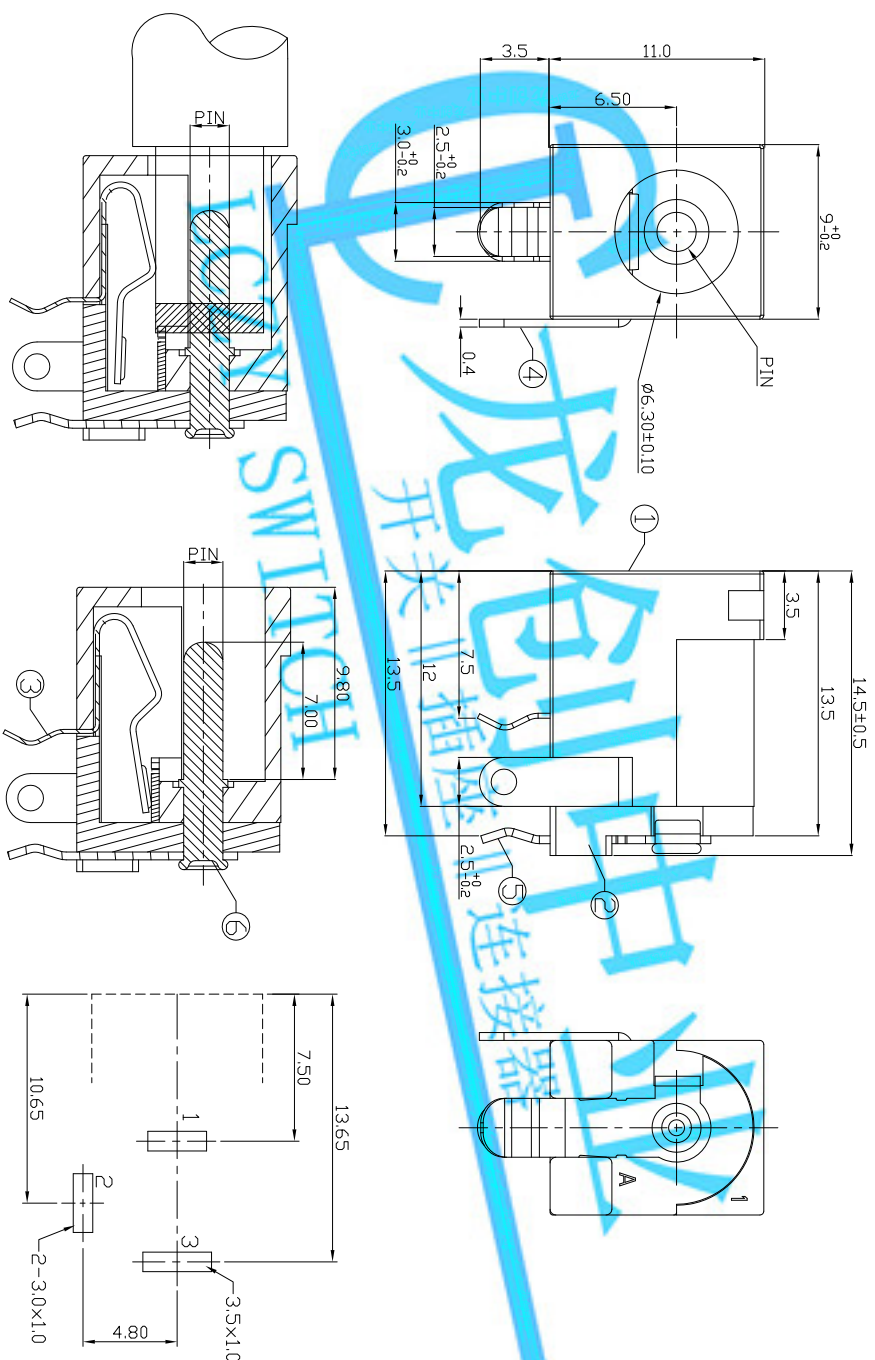

MODEL CODE:

DCSO-0203E-A □ PB BK S 0 4

(1) (2) (3) (4) (5) (6) (7) (8) (9)

(1):Series type:DIP DC POWER JACK.

(2) Series No.

(3):Schematic option: A

(4):Center pin diameter:

G=Ø1.65 , H=Ø2.0 , J=Ø2.5

(5):Material of housing:

$$P_B = P_T$$

(6):Housing color:

BK=Black

(7):Terminal plating

S=Silver(Ag)

(8):Special option:

0=No special option

(9)Packing mode:

4=Bag packing

Specification:

1. Rating : DC 30V 1A.

2.Contact resistance : $\leq 100\text{m}\Omega$



3. Insulation resistance : $\geq 100M\Omega$ (DC250V).

4. Withstanding voltage: 500VAC.

5. Insertion and extraction force: 3~30N.

6.life test: 5000cycles min.

7. Operation temperature range: $-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$



Model No.	G	H	J
CENTER PIN	Ø1.65	Ø2.0	Ø2.5

Bill of materials:

[illegible]