

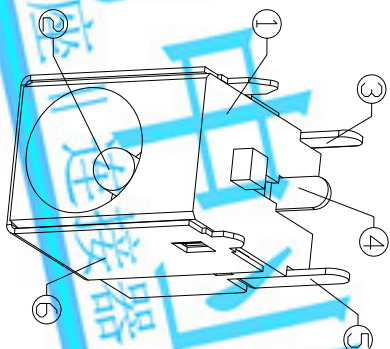
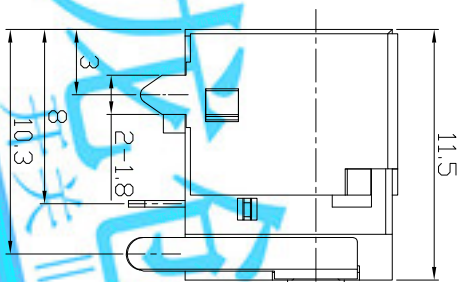
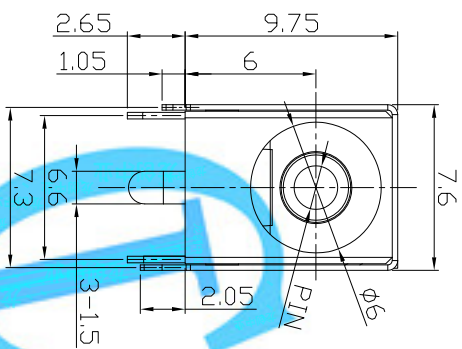




DIMENSIONS

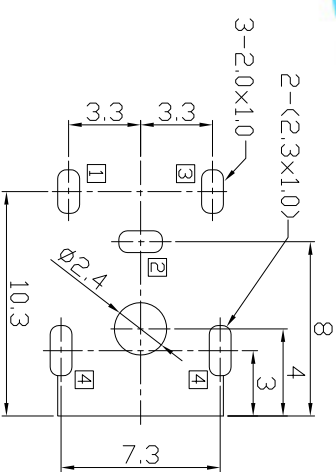

MODEL CODE:
DCB0-0036A- A □ PB BK S 0 4
(1) (2) (3)(4) (5) (6) (7)(8) (9)
(1):Series type:DIP DC POWER JACK.
(2):Series No.
(3):Schematic option: A , B
(4):Center pin diameter:
G=ϕ1.65 , H=ϕ2.0 , I=ϕ2.35 , J=ϕ2.5
(5):Material of housing:
PB=PBT (Standard)
(6):Housing color:
BK=Black
(7):Terminal plating
S=Silver(Ag)
(8):Special option:
0=No special option
(9):Packing mode:
4=Bag packing

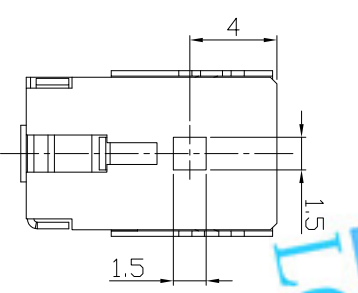

Model No.	G	H	I	J
CENTER PIN	ϕ1.65	ϕ2.0	ϕ2.35	ϕ2.5
DC MATE PLUG	ϕ4.0	ϕ5.5	ϕ5.5	ϕ5.5

○:ITEM NO. □:TERMINAL NO.

LONGCHUANG ZHONGYE (HK)CO.,LIMITED													
⑥		Shield plate	④	Brass t=0.25	1	Nickel(Ni) Plating	TOLERANCE	ANGLES	UNITS	TITLE: DIP DC POWER JACK PART NO.: DCBO-0036A			
							±0.3	±2°	MAT'L				
⑤		Shunt terminal	③	Brass t=0.3	1	Silver(Ag) Plating			SEE NOTE	DR: Rocky 2019/04/12 DWG NO.: AB0-0036A			
④		Tip spring	②	SUS301 t=0.3	1	Silver(Ag) Plating			FINISH				
③		Center pin terminal	①	Brass t=0.3	1	Silver(Ag) Plating			SEE NOTE	CHKD: Rocky 2019/04/12 APPD:			
②		Center pin	①	Brass	1	Nickel(Ni) Plating			Q'TY				
①		Housing		PBT UL94V-0	1					SCALE SHEET REV. A CUSTOMER DRAWING			
ND.		PARTS		MATERIAL	Q'TY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS WITHOUT WRITTEN CONSENT OF ACCURATE INNOTECH INC.						