



DIMENSIONS

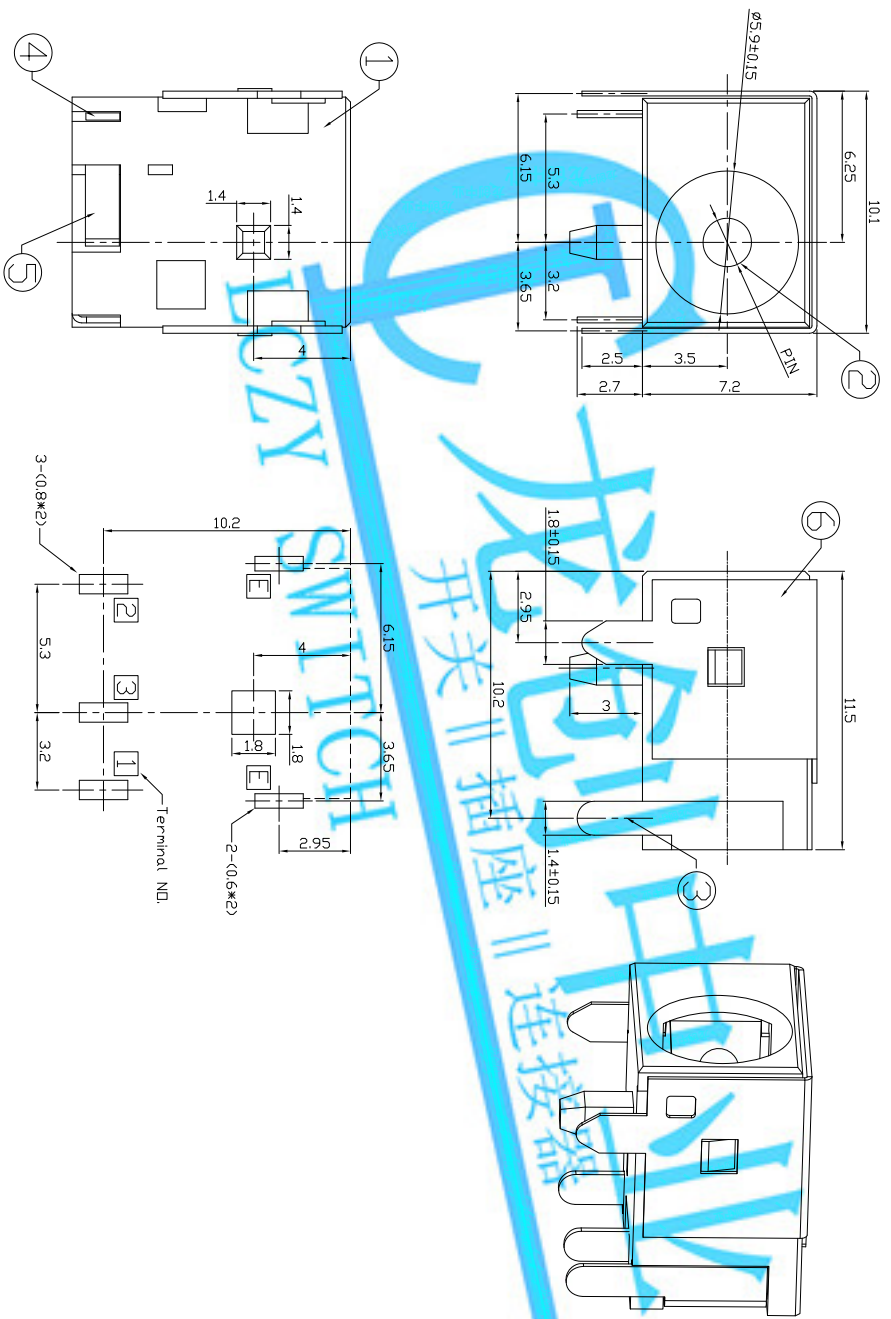

MODEL CODE:
DCB0-0044B- A □ PB BK S 0 4
(1) (2) (3)(4) (5) (6) (7)(8) (9)
(1)Series type:DIP DC POWER JACK.
(2)Series No.
(3)Schematic option: A , B
(4)Center pin diameter:
G=φ1.65 , H=φ2.0 , I=φ2.35 , J=φ2.5
(5)Material of housing:
PB=PBT(Standard) , 9T=PA9T
(6)Housing color:
BK=Black(Only)
(7)Terminal plating
S=Silver(Ag) (Standard)
T=Tin(Sn)
G=Gold(Au)
(8)Special option:
0=No special option
(9)Packing mode:
1=Reel packing
3=Plastic box packing
4=Bag packing

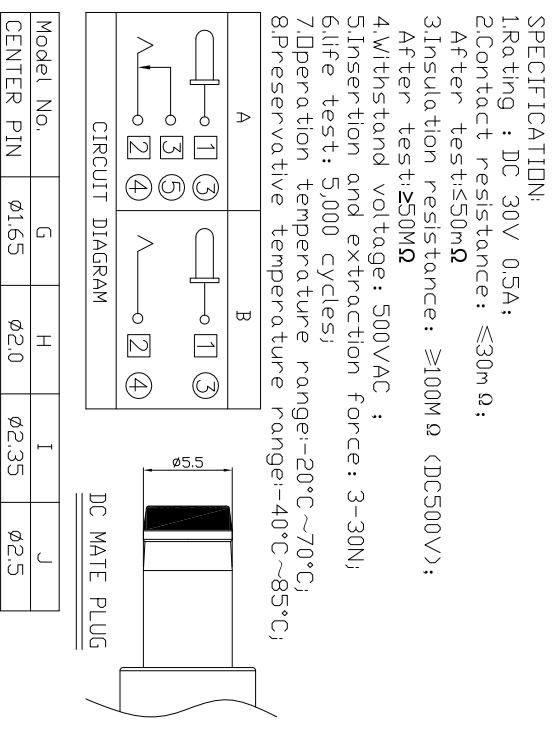

ITEM NO.		TERMINAL NO.																											
⑥	Earth terminal	Brass	1	Cu-Ni-Plating	TOLERANCE	ANGLES	UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED																					
⑤	Shunt terminal	Brass	1	Ni-Ag-Plating	±0.3	±2°	mm																						
④	Tip spring	Phosphor bronze	1	Ni-Ag-Plating			SEE NOTE																						
③	Center pin terminal	Brass	1	Ni-Ag-Plating			FINISH																						
②	Center pin	Brass	1	Cu-Sn-Plating			SEE NOTE																						
①	Housing	PBT/PA9T	1		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.																								
ND.	PARTS	MATERIAL	Q'TY	FINISHING																									