


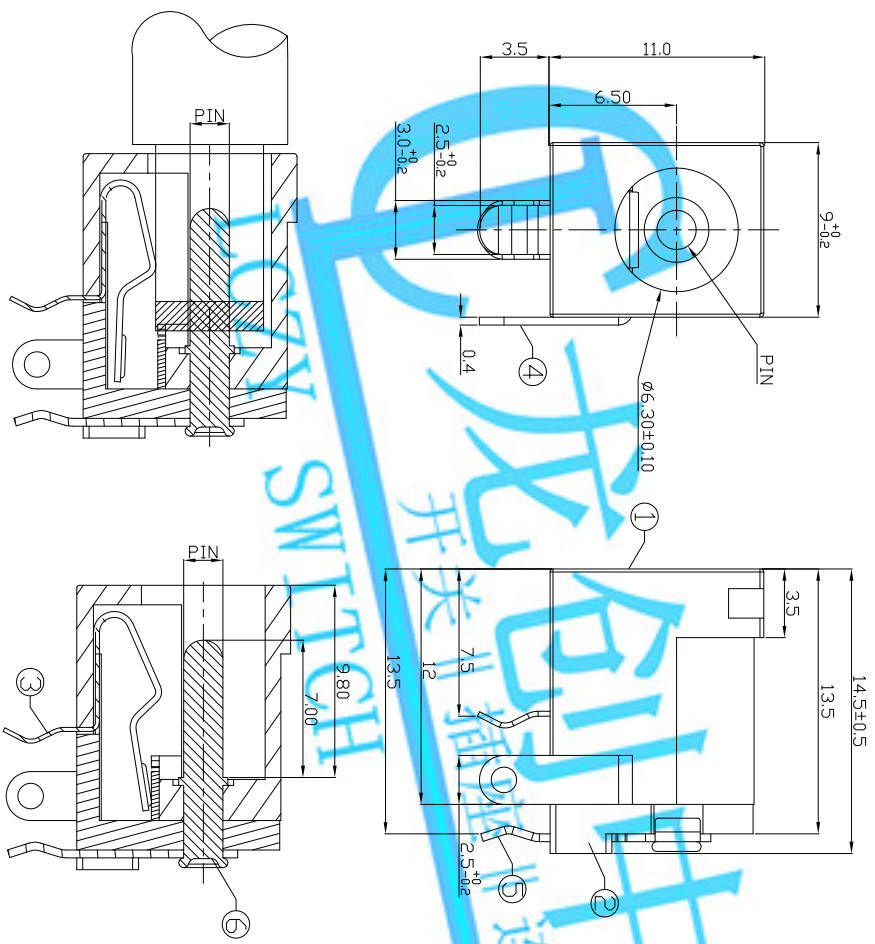
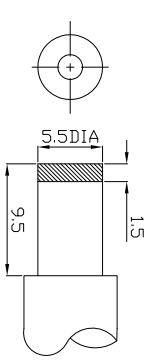



DIMENSIONS

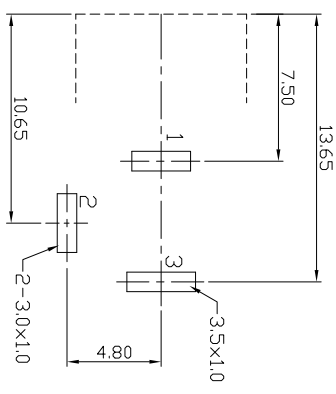

MODEL CODE:
DCS0-0203E- A □ PB BK S 0 4
(1) (2) (3)(4) (5) (6) (7)(8) (9)
(1):Series type:DIP DC POWER JACK.
(2):Series No.
(3):Schematic option: A
(4):Center pin diameter:
G=φ1.65 , H=φ2.0 , J=φ2.5
(5):Material of housing:
PB=PB1
(6):Housing color:
BK=Black
(7):Terminal plating
S=Silver(Ag)
(8):Special option:
0=No special option
(9):Packing mode:
4=Bag packing

Specification:
1.Rating : DC 30V 1A.
2.Contact resistance : ≤100mΩ.
3.Insulation resistance : ≥100MΩ (DC250V).
4.Withstanding voltage: 500VAC .
5.Insertion and extraction force: 3~30N.
6.life test: 5000cycles min.
7.Operation temperature range:-25°C~85°C



Model No.	G	H	J
CENTER PIN	φ1.65	φ2.0	φ2.5

Bill of materials:

NO.	PARTS	MATERIAL	Q'TY	FINISHING	TOLERANCE	ANGLES	UNITS	mm	MODEL NO.	REV.	ECN.	NO.	APPD.
1	PIN	BRASS	1	Ag-Plating	.XX ± 0.3	X°±5°	SEE NOTE	SEE NOTE	DCS0-0203E	1			
2	FLAP FOOT	BRASS	1	Ag-Plating	.XX ± 0.2	X°±3°	SEE NOTE	SEE NOTE	DCS0-0203E	2			
3	CURVE PIECE	BRASS	1	Ag-Plating	.XXX ± 0.1		SEE NOTE	SEE NOTE	DCS0-0203E	3			
4	SPRING PIECE	BRONZE	1	UL94V-0 BLACK			SEE NOTE	SEE NOTE	DCS0-0203E	4			
5	COVER	PBT	1	UL94V-0 BLACK			SEE NOTE	SEE NOTE	DCS0-0203E	5			
6	HOUSING	PBT	1	UL94V-0 BLACK			SEE NOTE	SEE NOTE	DCS0-0203E	6			
7	PARTS	MATERIAL	1	Q'TY	FINISHING		SEE NOTE	SEE NOTE	DCS0-0203E	7			