
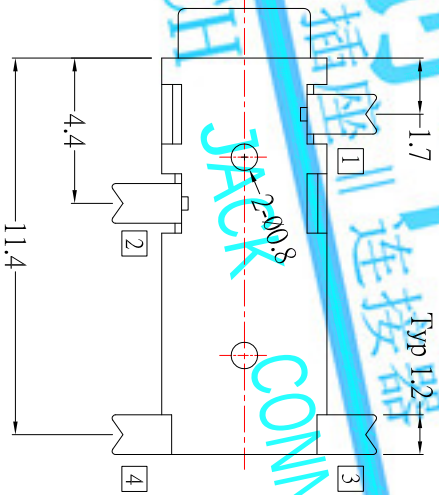
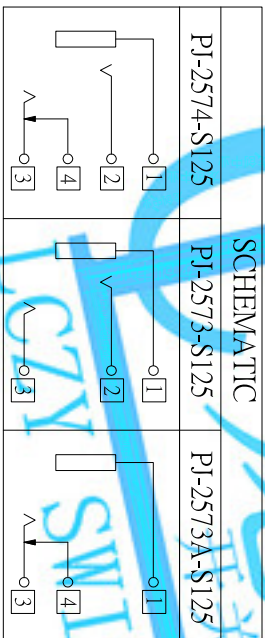
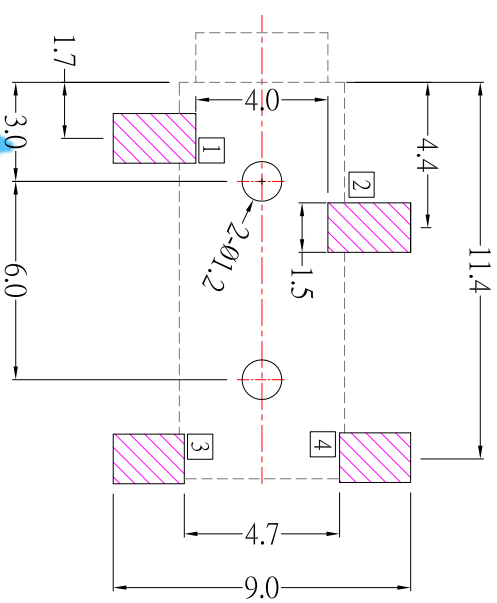
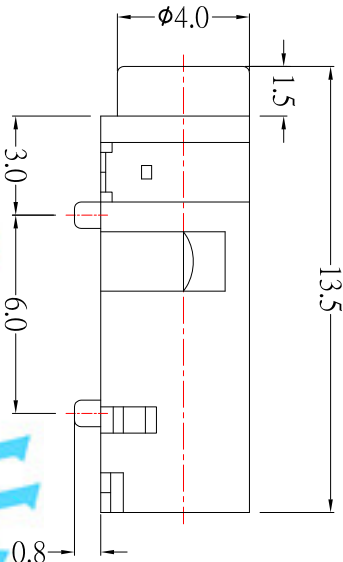


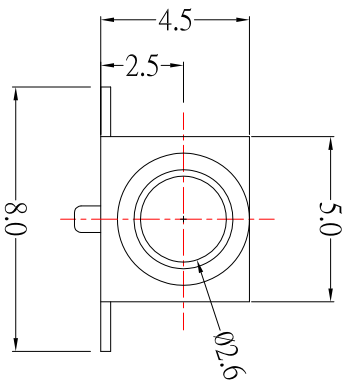

SPECIFICATION

1. Rating : DC 30V 0.5A
2. Contact resistance : $\leq 30m\Omega$
3. Insulation resistance : $\geq 100M\Omega$ (DC250V)
4. Withstand voltage : 250VAC
5. Insertion and extraction force : 3-20N
6. life test : 5,000 cycles

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

LONGCHUANG ZHONGYE (HK)CO.,LIMITED										DRAWN BY:		DATE		MAT'L		TITLE		JACK	
										Jack Lu		01/17/14							
										CHECKED BY:		DATE		FINISH		MODLE		PHONE JACK	
										Jacky Chen		01/17/14							
										APPROVED BY:		DATE		SCALE		DWG NO.		P1-257K-S125	
										Tony Kao		01/17/14		SHEET NO.		1 of 1		PART NO.	
																		P1-257K-S125	
																</			