


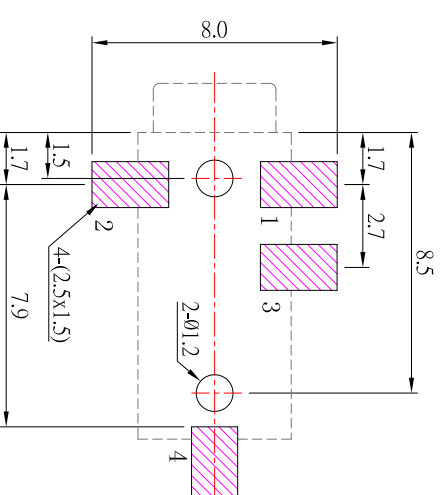




PJ-2683-S125	PJ-2684-S125

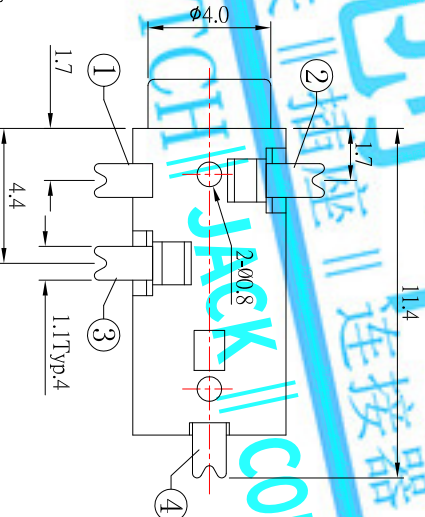

1. Rating : DC 30V 0.5A ;
2. Contact resistance : $\leq 0.03 \Omega$;
3. Insulation resistance : $\geq 100 M\Omega$ (DC250V) ;
4. Withstand voltage : 500VAC ;
5. Insertion and extraction force : 3-20N ;
6. life test : 5,000 cycles °

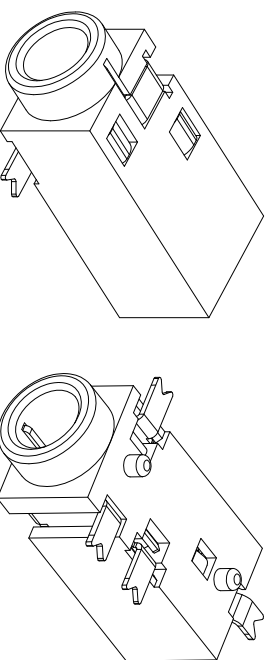

⑤	HOUSING	1	FR52	
④	4# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
③	3# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
②	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
①	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

	Up to 5	± 0.2
TOLERANCE UNLESS	Above 5 ~ 15	± 0.3
	Above 15 ~ 30	± 0.4
OTHERWISE STATED :	Above 30 ~ 50	± 0.5
	Angle	± 0.3

[illegible]