RoHS Compliant

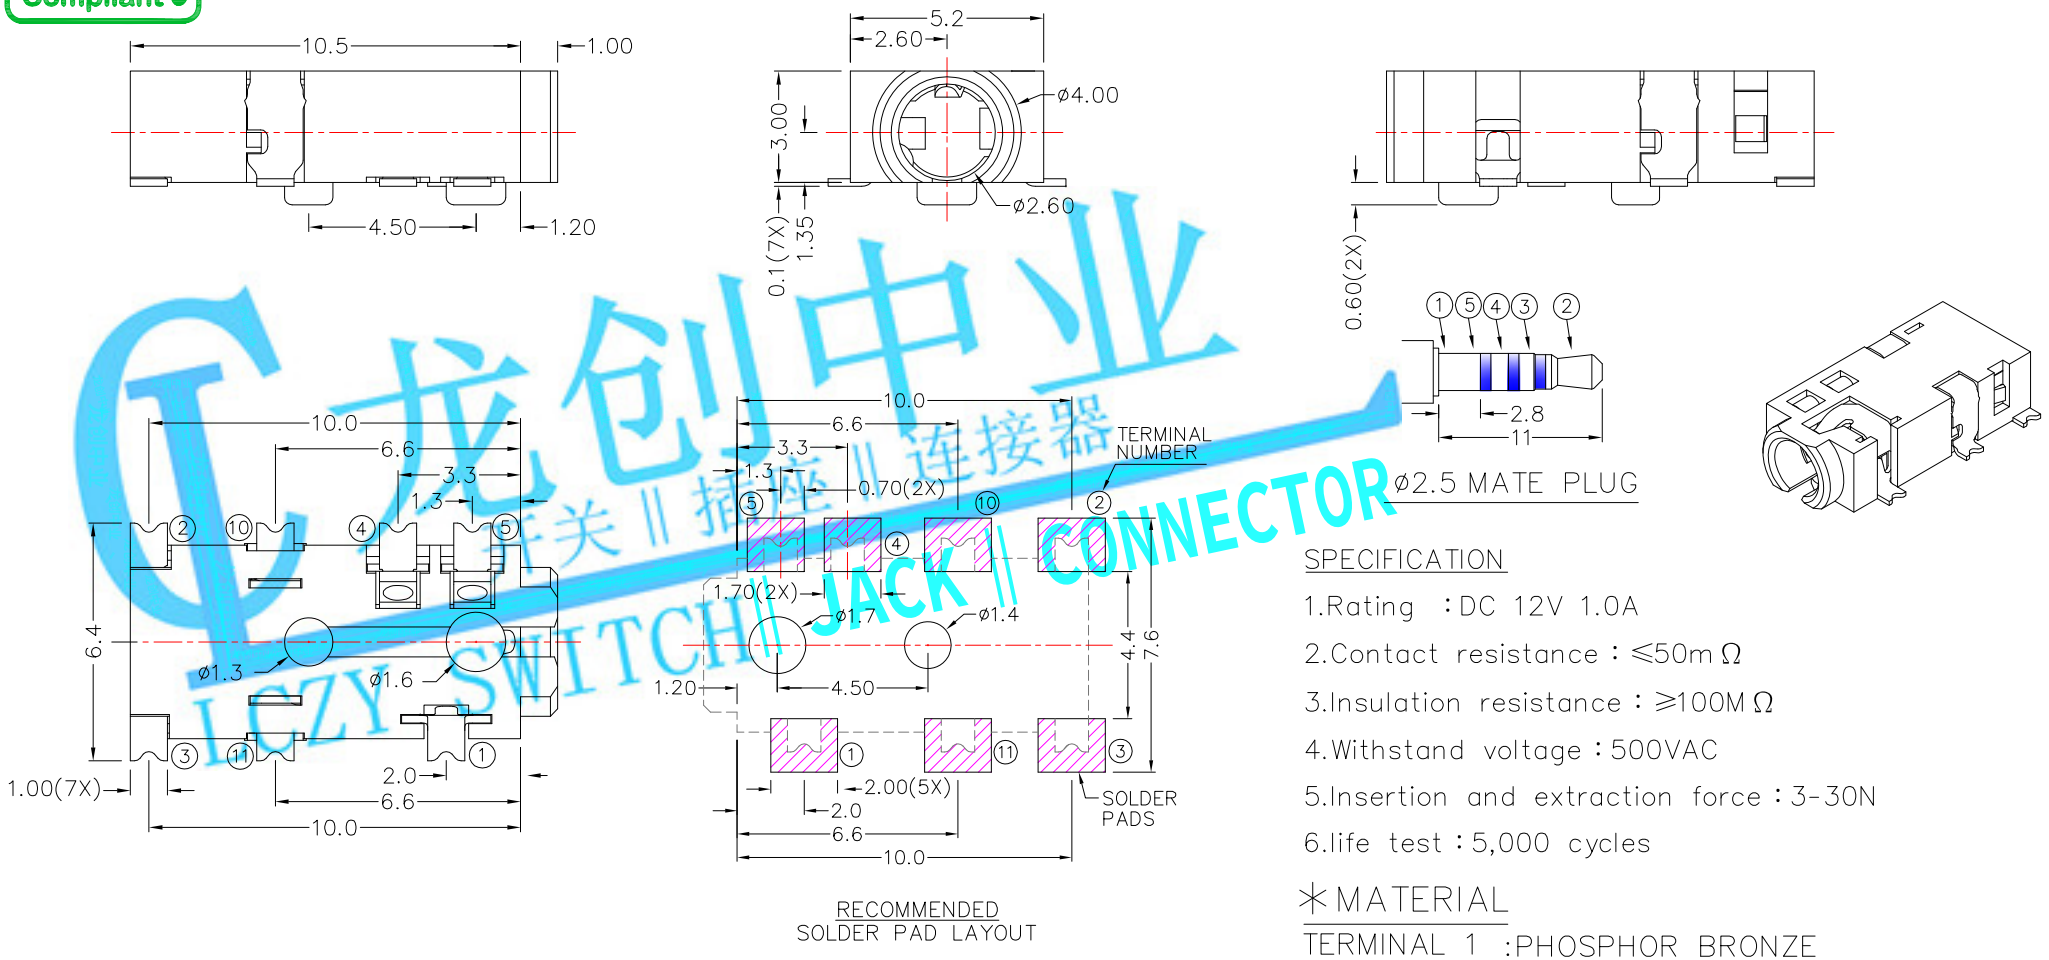

龙创中业 LONGCHUANG ZHONGYE
LCZY SWITCH || JACK || CONNECTOR
开关 || 插座 || 连接器

SPECIFICATION

1. Rating : DC 12V 1.0A
2. Contact resistance : ≤50mΩ
3. Insulation resistance : ≥100MΩ
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-30N
6. life test : 5,000 cycles

✳ MATERIAL

TERMINAL 1 : PHOSPHOR BRONZE
TERMINAL 2 : PHOSPHOR BRONZE
TERMINAL 3 : PHOSPHOR BRONZE
TERMINAL 4 : PHOSPHOR BRONZE
TERMINAL 5 : PHOSPHOR BRONZE
TERMINAL 10 : PHOSPHOR BRONZE
TERMINAL 11 : PHOSPHOR BRONZE
HOUSING : PA6T

MODEL NO.	PJ-2937D	PJ-2936AD	PJ-2936BD	PJ-2936D	PJ-2935D
SCHEMATIC					

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	新增SPEC	Jack	110415

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2; Above 5 ~ 15 ±0.3; Above 15 ~ 30 ±0.4; Above 30 ~ 50 ±0.5; Angle ±0.3°

3RD. ANGEL'S | UNITS MM

DRAWN BY: Jack Lu	DATE 11/04/15	MAT'L		TITLE	JACK
CHECKED BY: Jacky Chen	DATE 11/04/15	FINISH		MODLE	PHONE JACK
APPROVED BY: Tony Kao	DATE 11/04/15	SCALE	1 : 1	DWG NO.	PJ-293xD
		SHEET NO.	1 of 1	PART NO.	PJ-293xD

SIZE A4 | VER R1