






P.C.B LAYOUT
TOP VIEW


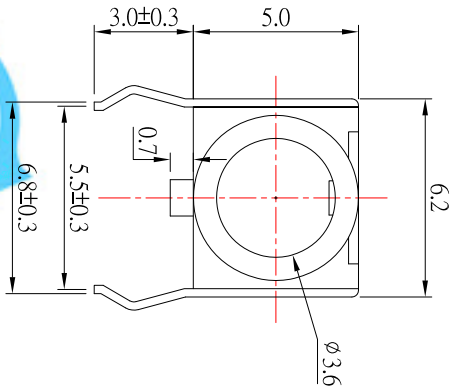


SPECIFICATION

- 1.Rating : DC 30V 0.5A ;
- 2.Contact resistance : ≤50mΩ ;
- 3.Insulation resistance : ≥100MΩ (DC250V) ;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N;
- 6.life test : 5,000 cycles °

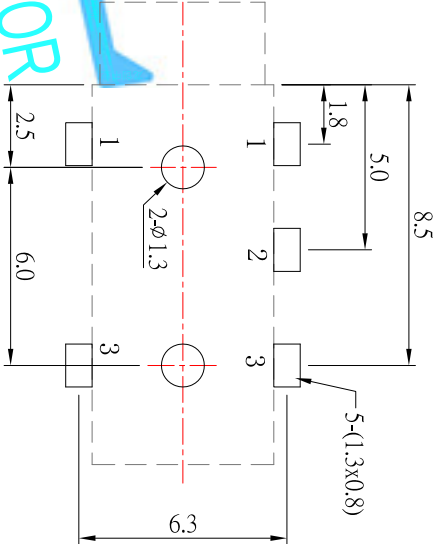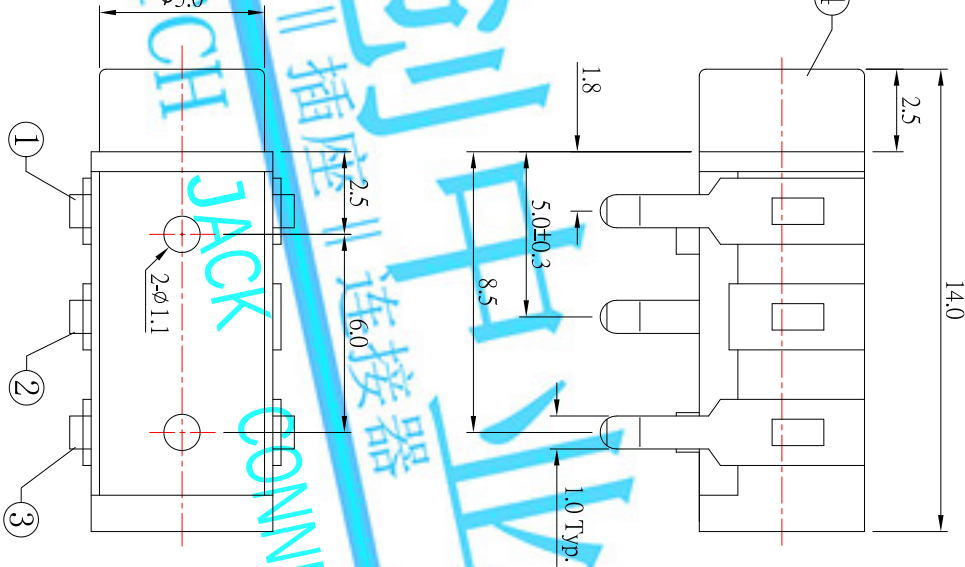

SCHEMATIC

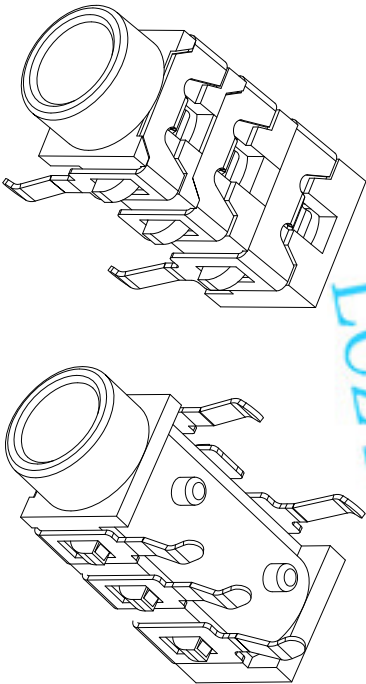

4	HOUSING	1	PBT	
3	CONTACT FOOT	1	SUS301	Sn-Plating
2	CONTACT FOOT	1	SUS301	Sn-Plating
1	CONTACT FOOT	1	SUS301	Sn-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

DRAWN BY:		DATE		MAT'L		TITLE	
Jack Lu		04/18/19				JACK	
CHECKED BY:		DATE		FINISH		MODLE	
Jacky Chen		04/18/19		SCALE		PHONE JACK	
APPROVED BY:		DATE		SHEET NO.		DWG NO.	
Tony Kao		04/18/19		1 of 1		PR-354-S125	
PART NO.		PR-354-S125		SIZE		A4	
VIER		R3					