

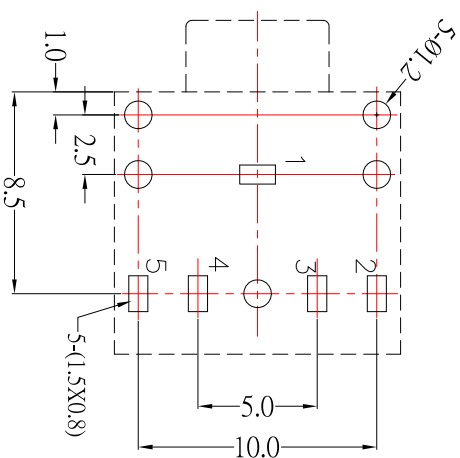
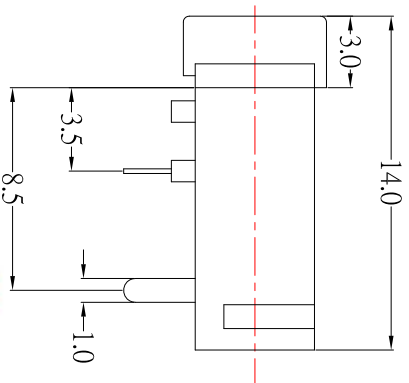
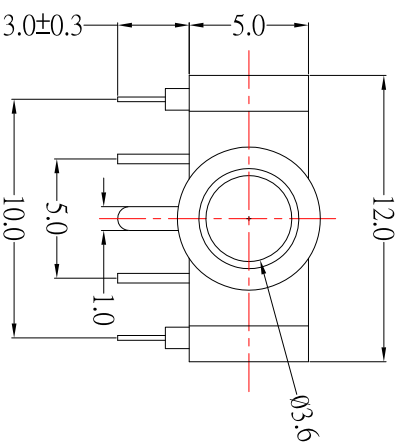


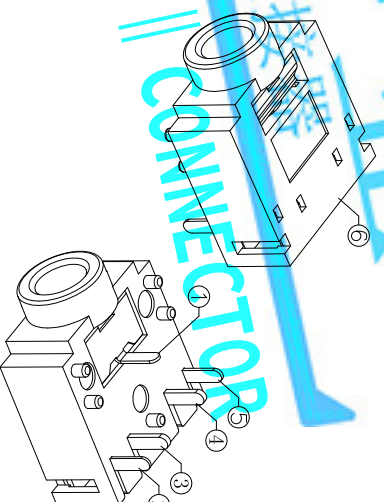

P.C.B LAYOUT MOUNTING PATTERN
(TOP VIEW)

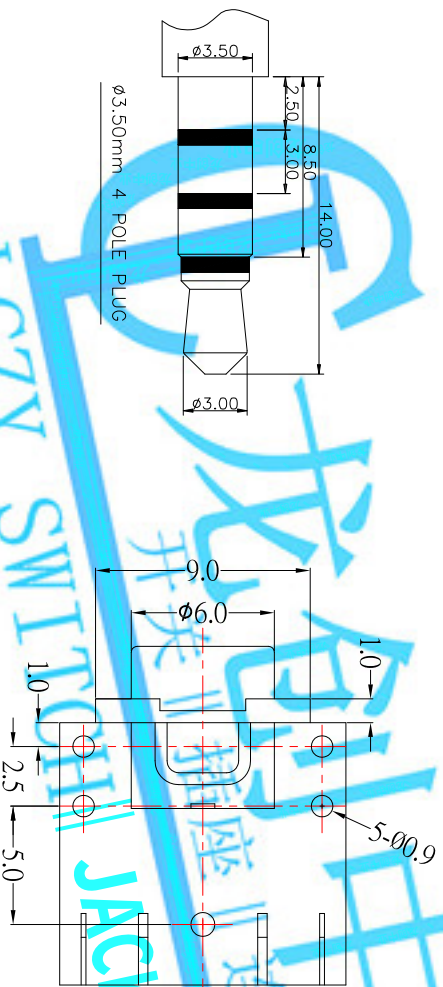

- SPECIFICATION**
- 1.Rating : DC 30V , 0.5A ;
 - 2.Contact resistance : $\leq 30m\Omega$;
 - 3.Insulation resistance : $\geq 100M\Omega$;
 - 4.Withstand voltage : 500VAC ;
 - 5.Insertion and extraction force : 3-20N
 - 6.life test : 5,000 cycles °

SCHEMATIC

PJ-3615-S124	PJ-3614-S124	PJ-3614A-S124	PJ-3613-S124	PJ-3613A-S124

6	HOUSING	1	PBT	
5	CONTACT FOOT #5	1	Phosphor Bronze	Sn-Plating
4	CONTACT FOOT #4	1	Brass	Sn-Plating
3	CONTACT FOOT #3	1	Brass	Sn-Plating
2	CONTACT FOOT #2	1	Stainless Steel	Sn-Plating
1	CONTACT FOOT #1	1	Phosphor Bronze	Sn-Plating
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

DRAWN BY: Jack		DATE: 05/24/18		TOLERANCE UNLESS OTHERWISE STATED : Up to 5° ±0.2, Above 5 ~ 15° ±0.3, Above 15 ~ 30° ±0.4, Above 30 ~ 50° ±0.5, Angle ±0.3°	
CHECKED BY: Jacky Chen		DATE: 05/24/18		3RD. ANGEL'S	
APPROVED BY: Tony Kao		DATE: 05/24/18		UNITS	
SHEET NO. 1 of 1		SCALE 1 : 1		MM	
PART NO. PJ-361x-S124		DWG NO. PJ-361x-S124		SIZE A4	
REVISION R1		DRAWN DATE		VIER	