

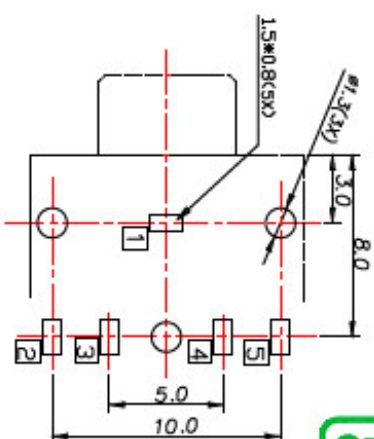
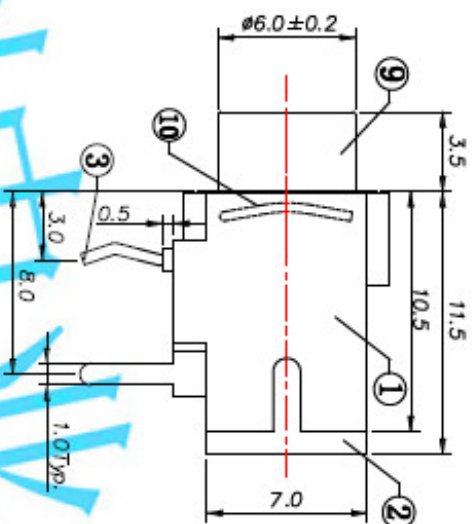
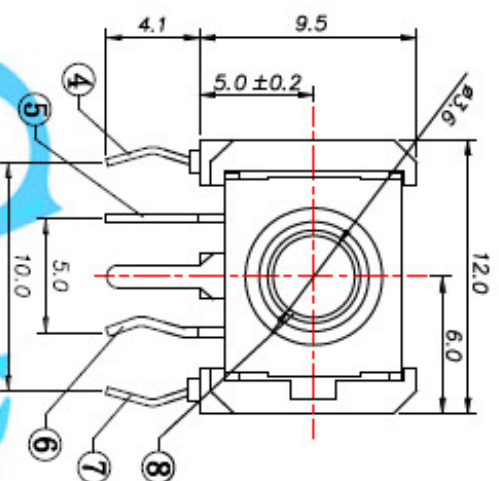


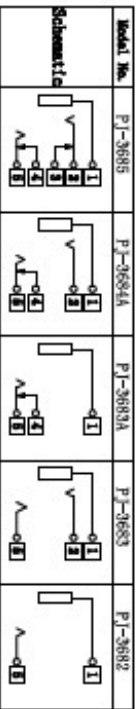

P.C.B LAYOUT

SPECIFICATION

1. Rating : DC 30V 0.5A
2. Contact resistance : $\leq 30\text{m}\Omega$
3. Insulation resistance : $\geq 100\text{M}\Omega$
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-30N
6. Life test : 5,000 cycles

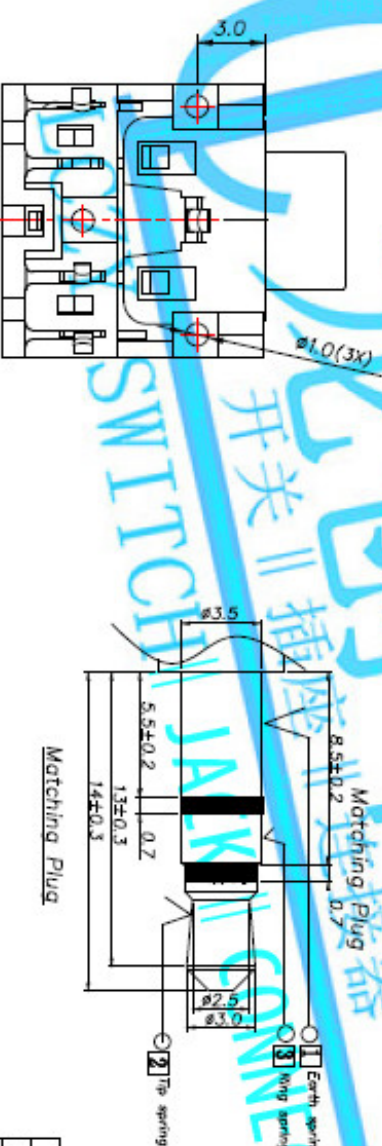

TERMINAL NO.

⑩	spring	1	SPRING WIRE	Ni-Plating
⑨	Bushing	1	PBT	
⑧	Bushing	1	COPPER ALLOY	Ni-Plating
⑦	Tip spring	1	PHOSPHOR BRONZE	Tin/Ag-Plating
⑥	Shurt terminal	1	BRASS	Tin/Ag-Plating
⑤	Shurt terminal	1	BRASS	Tin/Ag-Plating
④	Ring spring	1	PHOSPHOR BRONZE	Tin/Ag-Plating
③	Earth spring	1	BRASS	Tin/Ag-Plating
②	Cover	1	PBT	Black
①	Housing	1	PA66	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

LONGCHUANG ZHONGYE (HK) CO., LIMITED

[illegible]