




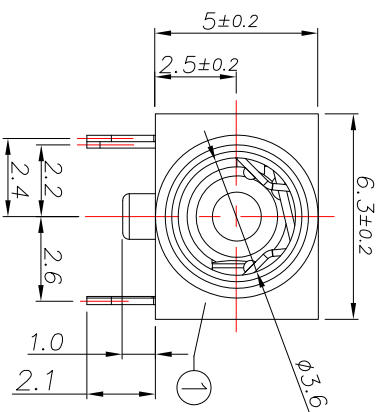


Model No.	PJ-3814-S124	PJ-3813A-S124	PJ-3813-S124
Schematic			

□: Terminal No.

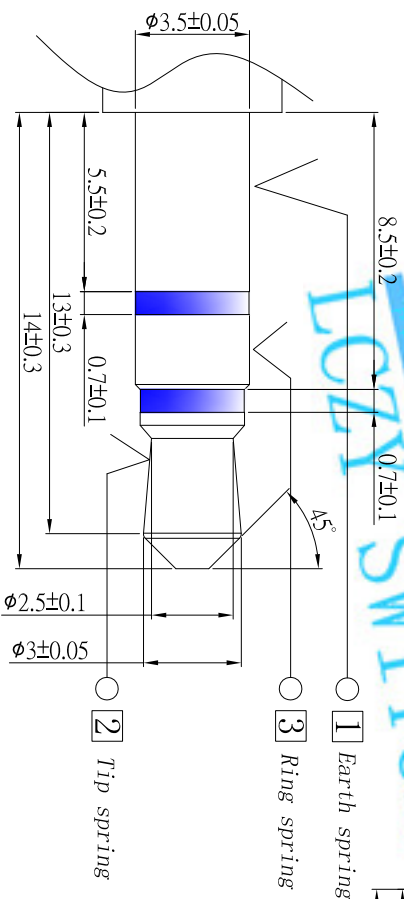

Matching Plug

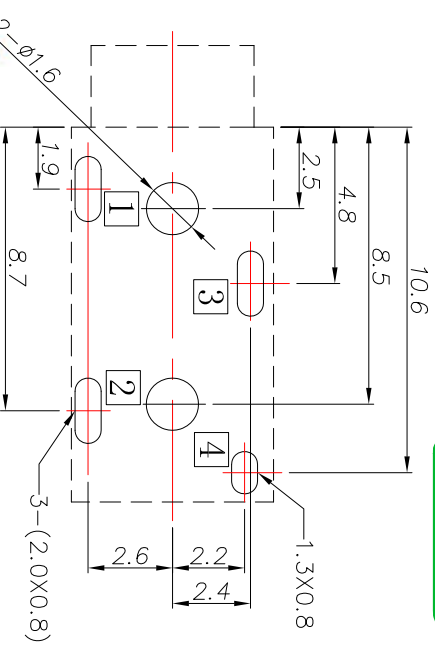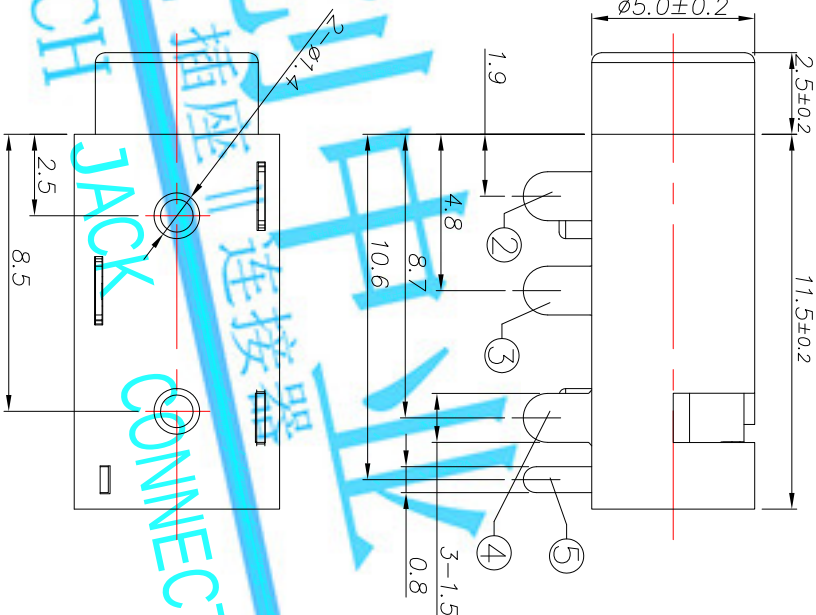

P.C.B LAYOUT
TOP VIEW

SPECIFICATION

1. Rating : DC 30V 0.5A ;
2. Contact resistance : $\leq 30m\Omega$;
3. Insulation resistance : $\geq 100M\Omega$;
4. Withstand voltage : 500VAC ;
5. Insertion and extraction force : 3-30N
6. life test : 5,000 cycles °

⑤	Shunt terminal	④	1	Copper Alloy	Ag plating
④	Tip spring	②	1	Copper Alloy	Ag plating
③	Ring spring	③	1	Copper Alloy	Ag plating
②	Earth spring	①	2	Copper Alloy	Ag plating
①	Housing		1	Thermoplastic	
NO.	DESCRIPTION	Q' TY	MATERIAL		REMARK

DRAWN BY:

Jack Lu

CHECKED BY:

Jacky Chen

APPROVED BY:

Tony Kao

DATE

07/25/18

DATE

07/25/18

DATE

07/25/18

MAT'L

FINISH

SCALE

1 : 1

SHEET NO.

1 of 1

TITLE

JACK

MODLE

PHONE JACK

DWG NO.

PJ-381x-S141

PART NO.

PJ-381x-S141

SIZE

A4

VER

R

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

TOLERANCE UNLESS
OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S

UNITS

MM

DATE

DATE

SCALE

1 of 1

PART NO.

PJ-381x-S141

SIZE

A4

VER

R